

Introduction:

1. Diamond calibrating wheels are designed for thickening and calibrating surface of granite, marble, and other stone, also including the counter.
2. The segment on the calibrating wheel can remove the stone uneven part rapidly. It can grind the shape and thickness what you want quickly.
3. Mainly used in profiling machine, edge cutting machine, bridge cutting machine.
4. The calibrating wheel including two types, normal calibrating wheel and silent calibrating wheel.
5. This diamond calibrating wheel diameter is 140mm, segment height is 10mm, inner hole is 50mm, the production process is sintering, weight about 1.9kg.

Features:

1. High efficiency and long lifespan.
2. Lower noise and environment friendly.
3. Making the stone surface thickening and calibrating.

Specification:

Diameter	Width	Segment Size			Segment Number	Inner hole
		Length	Width	Height		
300mm	30mm 40mm 50mm	34.6mm 46.2mm 57.7mm	9mm	6.5mm	34	50mm 60mm
350mm					40	
400mm					45	
500mm					60	
600mm					72	

Other connection and specification can be customized according to need.


Images:




boreway[®]



boreway[®]

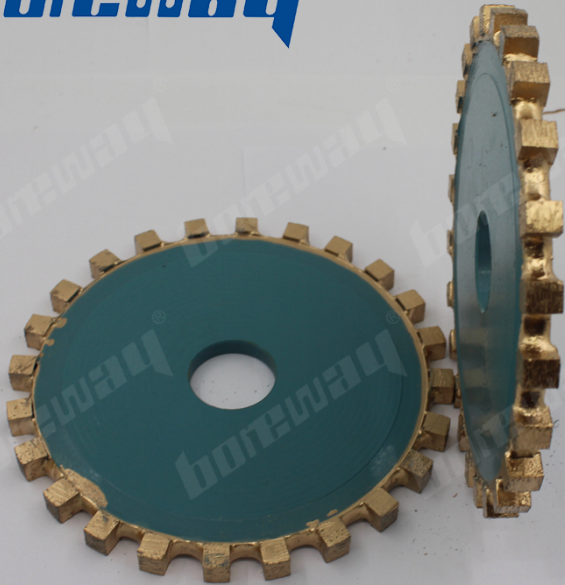

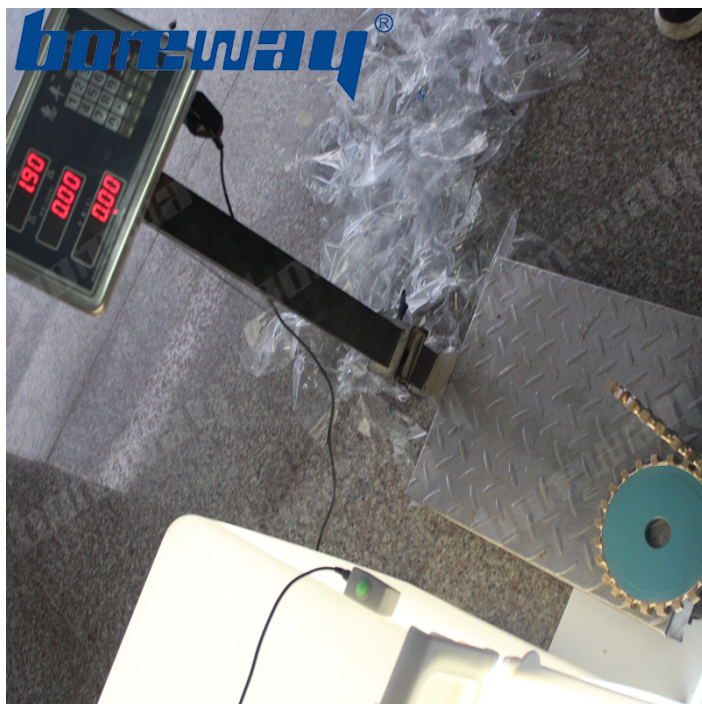

If you want know more images, please contact us.

Related products:

Contact us:

Fujian Nanan Boreway Machinery Co.,Ltd.

Address: Huahui Center 605, Shuitou Town,Quanzhou, Fujian, China

Post Code: 362342

TEL: (+86)595-86990206

FAX: (+86)595-86990220

Mobilephone/WhatsApp: (+86)13559599186

Wechat: boreway05 Facebook:13559599186