

**Introduction:**

The sintered standard flange fitting drainboard wheel is used to calibrate slab thickness before running edge tooling. Not recommended for use on soft marble.

**Features:**

1. Good balance and stable performance.
2. Easy and quick stock removal.

**Parameters:**


TurboTeeth Segment Heavy Duty Stubbing Wheel

Diameter(mm/Inch)		Thickness(mm)	Connection	Grit No.
50	2	20mm	Φ10-2+2Hole	#30
86	3-3/8	30mm	Φ50-3+3Hole	#60
100	4	40mm	Φ50-3+3Hole	#120

The parameters only for reference, other parameters are available upon requests.

**Pictures of Product:**

TurboTeeth Segment Heavy Duty Stubbing Wheel

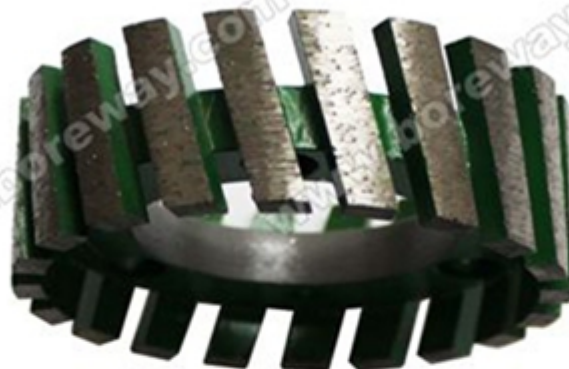

**Boreway Machinery Co., Ltd.**  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.com](http://www.boreway.com)

**boreway**®



**Boreway Machinery Co., Ltd.**  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.com](http://www.boreway.com)