



Boreway 150mm



- 1. [Placeholder]
 - 2. [Placeholder]
 - 3. [Placeholder]
 - 4. [Placeholder]
- [Placeholder] = [Placeholder] = OEM


Key slot design

1.Reduces the deformation of saw blade caused by cutting thermal expansion.

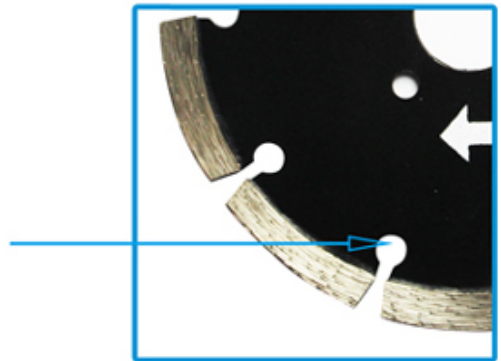

High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform



High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform



[Placeholder]

1 [Placeholder]

2. [Placeholder]

3. □□□□□□□□□□

4. □□□□□□□□□□□□□□□□

Our factory use original high grade diamond



pk

Other factory mix second diamond selected from waste segment




Our blade cutting effect



pk

Other supplier blade cutting effect

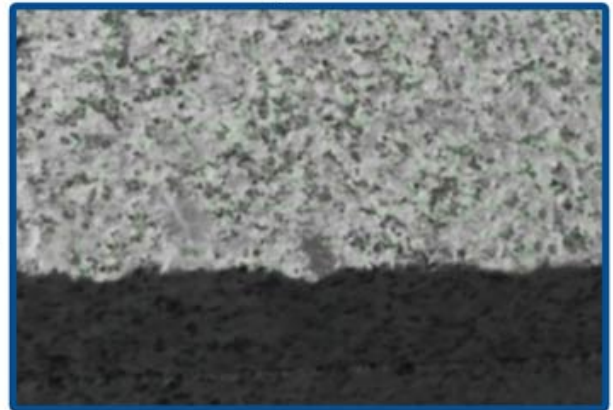


□□□□□□ □□□□□□□□□□

0.00
0.05
0.10
0.15
0.20
0.25
0.30
0.35
0.40
0.45
0.50
0.55
0.60
0.65
0.70
0.75
0.80
0.85
0.90
0.95
1.00

□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□



Non Slip Tile

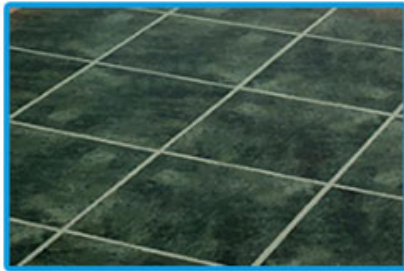

Floor Tile



Ceramic Tile



Concrete




Granite



Marble


□□□□

□□□□□□□□ □□ □□ □□□□□□□□□□□□

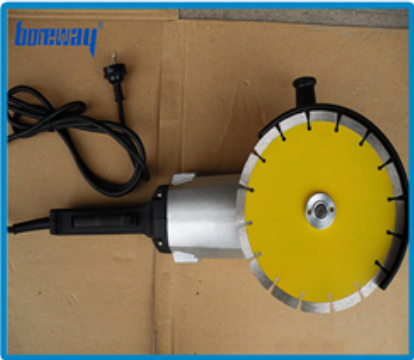



□□□□

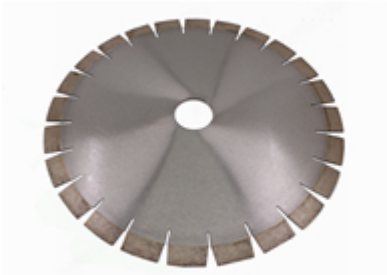

Boreway Machinery Co., Ltd.
www.diamondtools.top
www.boreway.com


D350 * 3.2 * 20 * 40mm * 50 / 60mm□□



Boreway Machinery Co., Ltd.
www.diamondtools.top
www.boreway.net

40□□1200□□□□

□□□□

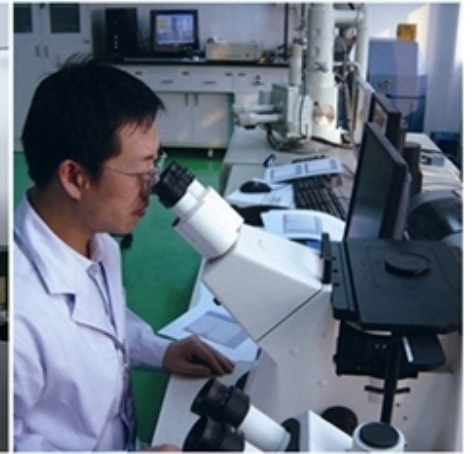



□□□□□□

PS□

1.□□□□□

2.□□□/□□□□□□□□□□□□□□/□□


3.□□45kg□□□□□□□□□□□

4.□□□□□□□□□□□□□


XX

XXXXXX

Fujian Nanan *boreway*[®] Machinery Co.,Ltd.

 XXXXXXXXXXXXXXXXXXXX605X362342

 XXXX +86X595-86990206 /  XXXX +86X595-86990220

 XXX/ **WhatsApp** /XXXX + 86X 18650679939

 XXXXXX **boreway@boreway.com**

 XXXX