

□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□

□□□□□


□□Lavina□□□□□□□□

1/4 PCD*2T



40*10*5mm*1T



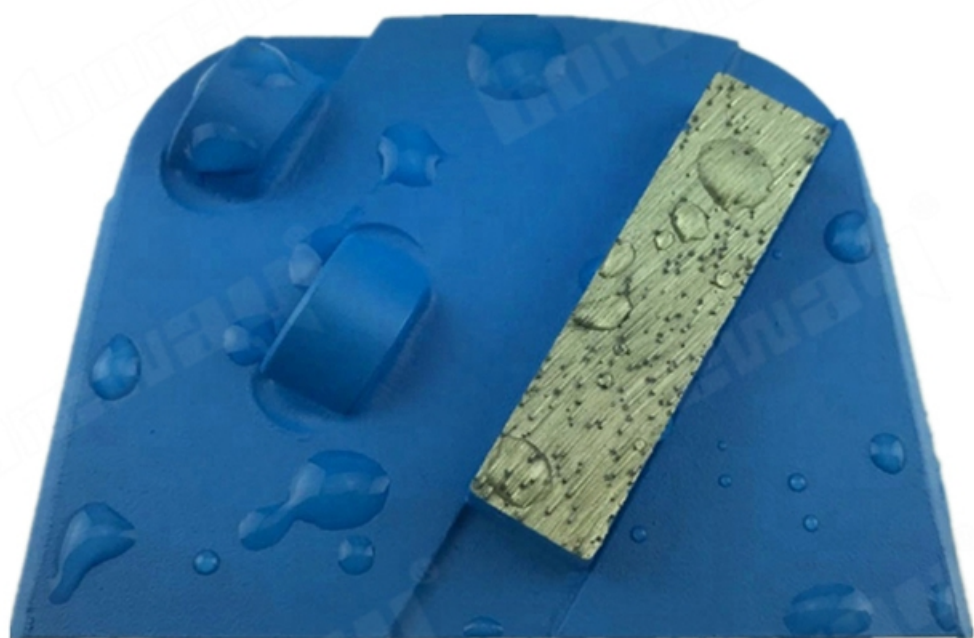







Application





Before Grinding and Polishing

After Grinding and Polishing



CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□

Lavina Quick Lock□□

□□Lavina□□□□□□□□Lavina□□□□

□□□□□□□□Lavina□□

□□2□□□3□M6 / M8□□□□Lavina□□



□□□□□□

1. □□□□□□□□□□□□□□□□□□□□
2. □ □□□□□□□□□□□□□□□□□□□
3. OEM □□□□□□□□□□□□□□□□□□□□
4. □□□□□□□□□□□□□□□□□□□□□□□□
5. □ □□□□□□□□□□□□□□□□□□□□□□□

□□□

1. □□□□□□□□□□□□□□□□□□□□
 □□□□□□□□□□□□□□□□□□□□
 □□□□□□□□□□□□□□□□□□□□
 □□□□□□□□□□□□□□□□□□□□
 □□□□□□8□□□□□□□□□□□□□□□□□□□

□□□

□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

3. □□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□

□□□□□

1. □□□□□□□□□□

2. □□□□□□□□□□

3. □□□□□□□□□□□□

□□□□□

Fujian Nanan *boreway* Machinery Co.,Ltd.



□□□□□□□□□□□□□□□□605□362342



□□□ □+86□595-86990206 /  □□□ □+86□595-86990220



□□/ **WhatsApp** /□□□ □+ 86□ 13559599186



□□□□□ boreway05@boreway.net



□□□