





|     |      |    |             |          |     |
|-----|------|----|-------------|----------|-----|
| 52  | 1300 | 24 | 8.0 / 7.4   | 15/20    | 88  |
| 56  | 1400 | 24 | 9.0 / 8.4   | 15/20    | 96  |
| 64  | 1600 | 24 | 9.0 / 8.4   | 15/20    | 108 |
| 72  | 1800 | 24 | 10 / 9.0    | 15/20    | 120 |
| 80  | 2000 | 24 | 10.6 / 9.8  | 15/20    | 128 |
| 88  | 2200 | 24 | 11.5 / 10.5 | 15/20    | 136 |
| 100 | 2500 | 24 | 11.8 / 10.8 | 15/20    | 140 |
| 120 | 3000 | 24 | 13.0 / 12   | 15/20    | 160 |
| 140 | 3500 | 24 | 13.5 / 12.5 | 15/20/30 | 180 |

□□1200□□□□□ □□□□□□□□□□□□□□  
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□



**1200**□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

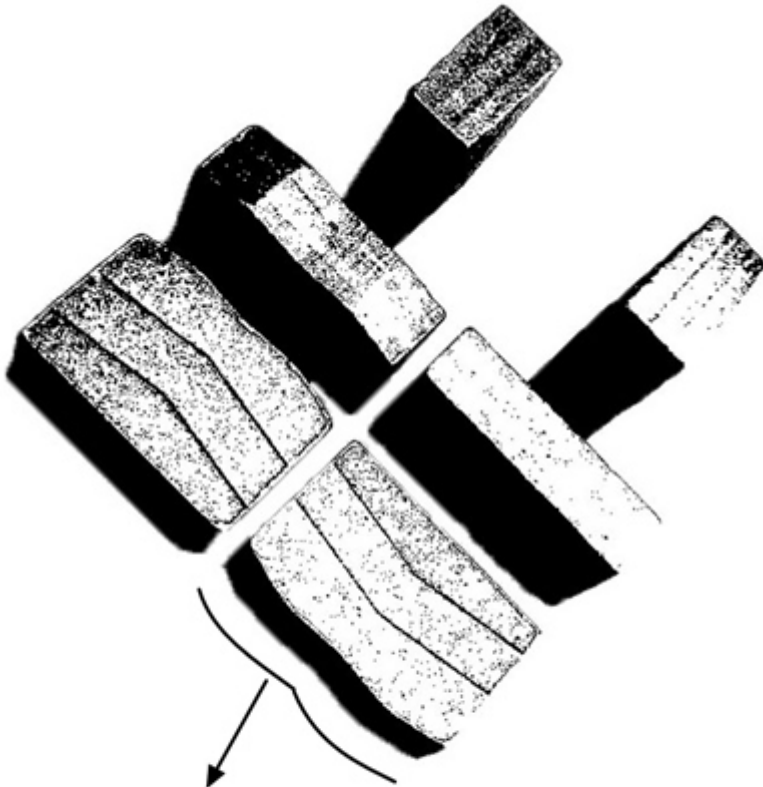

M shape Multi Layer Structure,  
Good debris removal and better cooling

1200□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□

## Applicable materials


To meet your demands for cutting different materials, such as granite, marble, quartz stone, sand stone, microcrystalline stone, volcanic rock, concrete, glass, ceramic, masonry etc. Different segments recipe were been developed by our company.








SPK: 24\*8.4/7.6\*15M  
DIA: 600-1800/2000  
FOR Granite  
NUM: 100Pcs  
SD604 6-18/20 U115 K45  
DATE: 2013.03.26

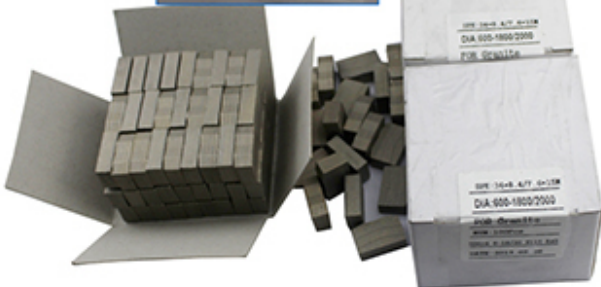








□□□

1. □□□□□□□□□□
2. □□□□□□□□□□
3. □□□□□□□□□□

□□□□□

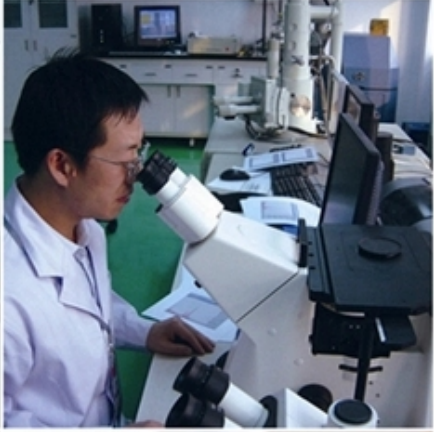



□□



□□





