[illegible]:

[illegible]

[illegible]

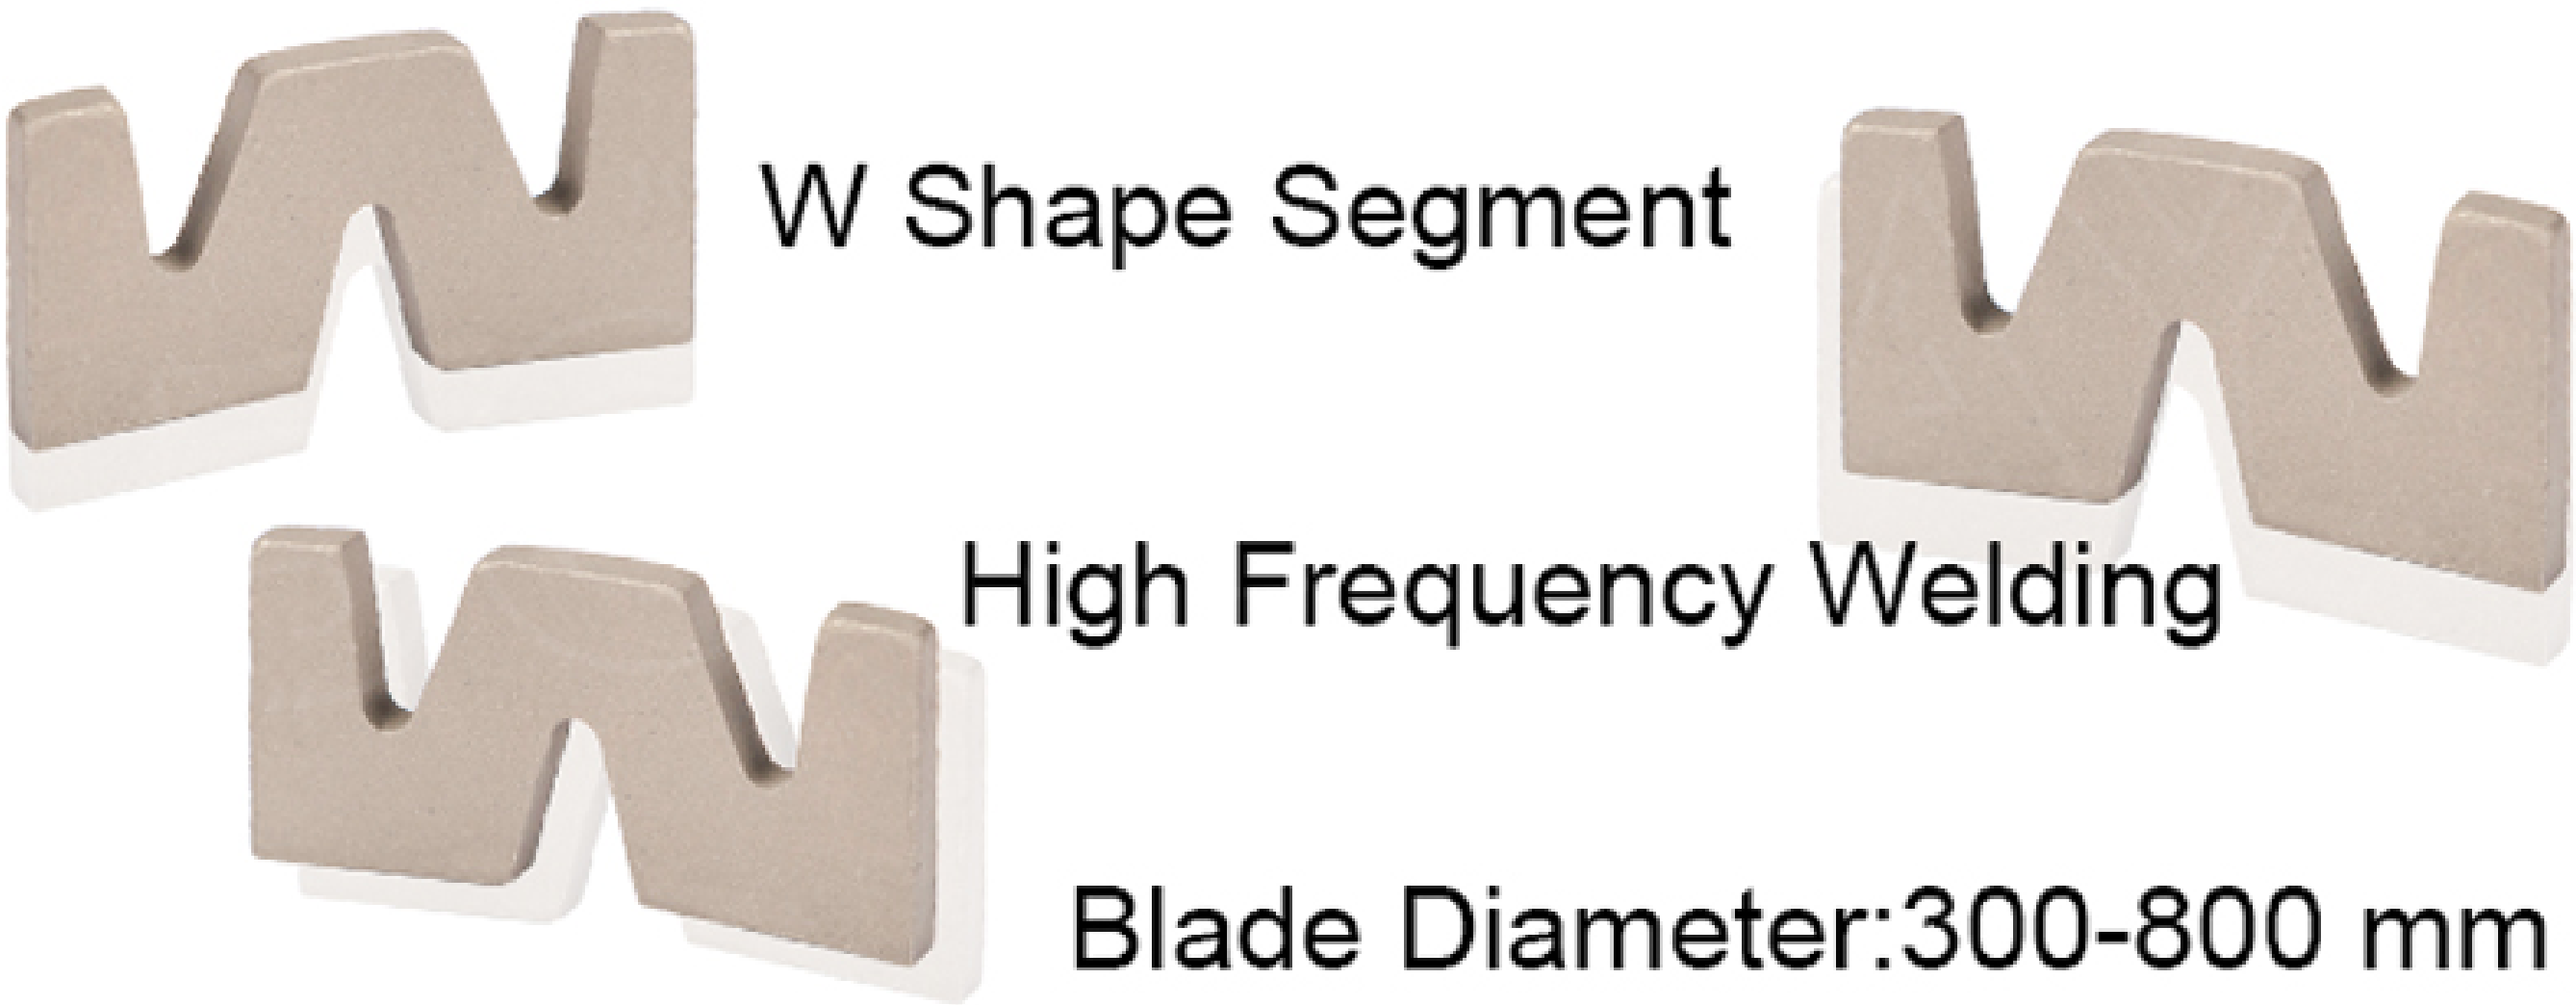
W Shape Segment
High Frequency Welding
Blade Diameter:300-800 mm

[illegible]:

1. [illegible]

2. [illegible]

3. [illegible]

[illegible]:

[illegible]

□□□□□ □□□□□		□□□ □□□□□ (□□□□)	□□□ □□□□ (□□□□)	□□□ □□□□□□ (□□□□)
12 □□□	300 □□□□	2.2/2.0	40 × 3.2 × 15□ 20□	21
14 □□□	350 □□□□	2.4/2.2	40 × 3.2 × 15□ 20□	24
16 □□□	400 □□□□	2.8/2.4	40 × 3.2 × 15□ 20□	28
18 □□□	450 □□□□	2.8/2.6	40 × 3.2 × 15□ 20□	32
20 □□□	500 □□□□	3.2/2.8	40 × 3.2 × 15□ 20□	36
22 □□□	550 □□□□	3.2/3.0	40 × 3.2 × 15□ 20□	38
24 □□□	600 □□□□	3.6/3.2	40 × 3.2 × 15□ 20□	42
26 □□□	650 □□□□	4.0/3.6	40 × 3.2 × 15□ 20□	46
28 □□□	700 □□□□	4.0/3.8	40 × 3.2 × 15□ 20□	50
32 □□□	800 □□□□	4.5/4.2	40 × 3.2 × 15□ 20□	57

□□□□□□□□ □□□□□□□□□□ □□□□□ □□□□□□□ □□ □□□□ □□, □□□□□ □□□□□□□□□□ □□□□□□□ □□ □□□□□ □□ □□□□□□□ □□□□□□□ □□ □□□□□ □□□□□

□□□□□□ □□□□□□□□□□

□□□□□□□□ □□□□□ □□□□□□□□□ □□□□□□□ □□□□□ □□□□ □□ □□□□□□ □□ □□□□ □□□□□□ □□□□□□□□□

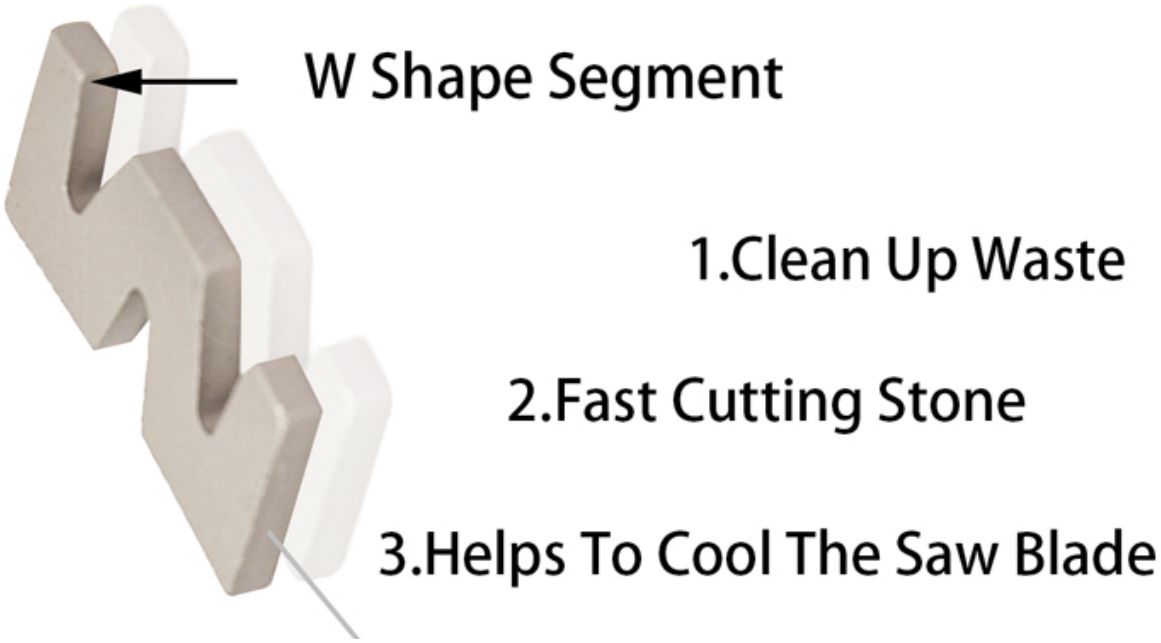

Special design W-type diamond saw blade segment

Prolong the service life of saw blade and reduce cutting friction.

Reduce the contact area between the cutter head and the cutting material.

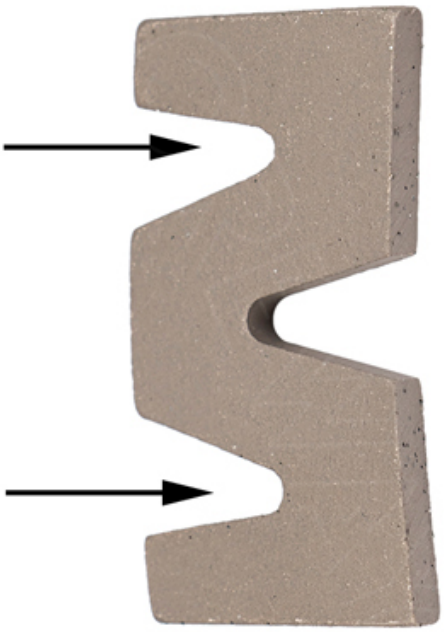

□□□□□ □□□□:

[illegible] 350-3500 [illegible],
[illegible], [illegible]

[illegible], [illegible]

[illegible], [illegible]

[illegible], [illegible], [illegible]

[illegible]

[illegible]

1. [illegible]?

[illegible], [illegible], [illegible], [illegible], [illegible], Boreway [illegible]

2. [illegible]

[illegible]-[illegible] ([illegible]) [illegible] ([illegible]) [illegible]

3. [illegible]?

[illegible] 24 [illegible], Boreway [illegible] OEM/ODM [illegible] OEM/ODM [illegible]: [illegible]!

□□□□□□ □□□□:

Fujian Nanan boreway Machinery Co.,Ltd.

No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China

□□□□□□□: (+86) 595-86990206 / □□□□□□:(+86) 595-86990220

□□□□□□□ / **WhatsApp** / **WECHAT:**(+ 86) 18650679939

□□□□: **boreway@boreway.com**

Lyon Chang