

000000:



00000000 00000 000000000 0000000 000000 00 000 0000000000 00000000 00 000000 00000 000000 000000 0000

00000000 00000 00 0000000, 000000000, 00000 00 00000 00 00000 000 00000 00000000 000000 00 000 000000000 00000 0000 000 PCD 00 0000000 00000 **Lavina** 0000 0000 00000000000000 0000000 0000 0000 00 00000000000 00000 00000

PCD 00 000000 00000 **Lavina** 0000 0000 00000000, 000000000, 00000, 000000000, 0000000000, 00000 000000, 00000000 000000000, 0000000 0000 00000000 00 0000-0000 0000000000 00 00000 00 00000 0000 0000000000 00000 0000 00000000 00 00000000 00 0000000 00 0000 0000

000000 000000:

00000000000000 000000000 000000000000 0000 PCD 00 0000000 00000 **Lavina** 0000 0000:

0000:	PCD 00 0000000 00000 Lavina 0000 0000
0000 0000000:	16-270 # 00000
0000 00000:	1/4 PCD * 2T 00 0000000 00000 * 2T
00000:	PCD 00 0000000 00000 0000
0000000000:	PCD 00 0000000 00000 00 Lavina 000000 000000
0000000000:	0000000 0000000 0000 0000000000
0000000:	0000000000 00 Terrazzo 0000000
000000:	0000000 0000000 0000000000000 00000000000000 00000

□□□□□□:	□□□□□□ □□□□□□, □□□□□□ □□□□□□, □□□□□□ □□□□□□
---------	---

□□□□ □□ □□□□ □□□□□□□□□□ □□ □□□ □□□□□□ □□□□ □□ □□□□□□□□ □□□□ □□ □□□□□ □□□□□□ □□□□□ □□ □□ □□□□□□ □□□□□ □□□□□ □□□□□□ □□ □□□□ □□□□□ □□□□□□□□□□ □□ □□□□□□ □□□□□□□□

□□□□□□□ □□□□□□:

PCD □□ □□□□□ □□□□ **Lavina** □□□□ □□□□:



Lavina Quick Lock Connection









此圖係根據本公司之標準規格所製，其尺寸與本公司之標準規格一致。

請洽本公司之銷售人員以瞭解詳細情形。

PCD 係指螺絲孔之節距，**Lavina** 係指螺絲孔之深度 (螺絲孔之長度，螺絲孔之直徑) 螺絲孔之螺紋為公制螺紋，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0

(1) 螺絲孔之螺紋: M3.0, M3.0, M3.0, M3.0


螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0

(2) 螺絲孔之螺紋: M3.0, M3.0 / M3.0, M3.0 / its #, M3.0 #

螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0，螺絲孔之螺紋為 M3.0

(□) □□□□□ □□□□□: □□□ #, □□□ #, □ 200□ #, □□□ #, □ gr□ #

□□□ □□□□□ □□ □□□□□□ □□ □□□□□ □□□□ □□ □□□ □□□□□□□□ □□□□ □□ □□□ □□□□ □□□□ □□ □□□□□ □□□ □□□□□ □□ □□□□□ □□□□□ □□ □□□□□ □□ □□□□□ □□ □□□□□ □□ □□□□□

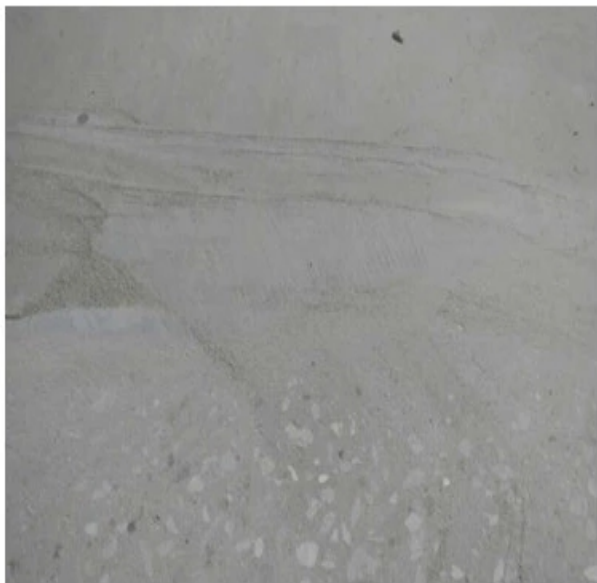

Application





Before Grinding and Polishing



After Grinding and Polishing

□□□□:

CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

□□□□ □□□□: □□□□ □□□□, □□□ □□□□ □□ □□□□, □□□□□□□□ □□□□□□ □□ □□□□□□ □□ □□□□□□ □□□□□□ □□□□

□□□□ □□□□ □□□ □□□□□□


□□□□ □□□□□□ □□ □□□ □□□□□□, □□□□□ □□□□□□□□□□□ □□□□ □□□ □□□□□□□ □□□□

□□□□ □□: □□□□□ □□□ □□□□□ □□□□□□

□□□□ □□: □□□□ □□ 6 / □□ 8 □□□□□□□ □□ □□□ □□□□□ □□□□□□



Lavina Quick Lock Blank

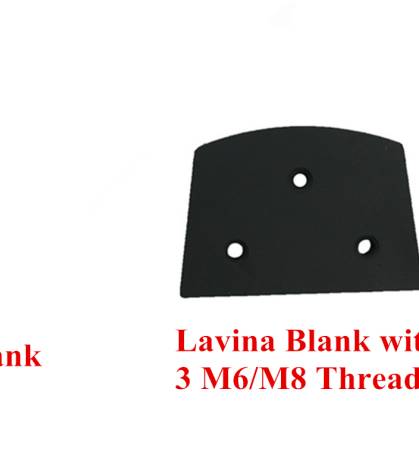

Lavina Blank with 3 M6/M8 Threads



Lavina Blank with 3 Bare Holes

請注意:

- 1) 請務必檢查工具頭與機殼的組合是否正確，以免發生危險。
- 2) 請務必檢查工具頭的安裝位置，以免發生危險。
- 3) 請務必檢查工具頭的安裝位置，以免發生危險。
- 4) PCD 的安裝位置，請務必檢查 Lavina 的安裝位置，以免發生危險。

請注意:

PCD 的安裝位置，請務必檢查 Lavina 的安裝位置，以免發生危險。

請注意:




2 1/4 PCD

Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net




Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

請注意:

請注意:

請注意:



00000 0000:

1. 00 00000 0000000: 00 00 00 000000 00000000 00 0000 00 0000 00 00000 00000
2. 00000 00 000000: 00 000 000000 00 00000 0000 000000000 0000
3. OEM 00000000000: 00 00000 000000 00 0000000 00 00000000 00000000 00 00000 00000
4. 0000000 0000000000: 00 00 00000 0000000000 0000000000 000000000 0000 0000000 0000 0000000000000
5. 0000000 00000: 00 00000 0000000000 00 00 00000 00000 00 000000000000000000 00 00000000 00 0000 000000 00 0000 000 0000000 00000

00000:

1. 0000 00 00000 00000000 00 0000000 00000 000000 0000, 00 00000 00000 0000000000 00000 0000 000000? 0000000 00000 00000 00000 00000 0000000000 00000 00 00 00000 00000000000 00 0000 000000000 00, 00 000000000 0000 00 0000 00000 00000 00000000000 00 00000 00000000000 00 00000 00000 00000000000 00 00000000 00 0000000000000000 00 00000000

