



□□□□□□□□-□□□□ 12514	5	125	3	14	□□ 10 M12 □□ 16 5/8 "-11 40h-50h Φ74-3 * □□ 8 □□□□□ □□□□□□□	□□□□ □□□ □□□□□ □□□
□□□□□□□□-□□□□ 12514			4	14		
□□□□□□□□-□□□□ 12520			3	20		
□□□□□□□□-□□□□ 12520			4	20		
□□□□□□□□-□□□□ 12530	5	125	3	30		
□□□□□□□□-□□□□ 15014	6	150	4	14		
□□□□□□□□-□□□□ 12520	6	150	4	20		
□□□□□□□□-□□□□ 155045	6	150	3	45		
□□□□□□□□-□□□□ 15030			4	30		
□□□□□□□□-□□□□ 20045	8	200	4	45		
□□□□□□□□-□□□□ 20030			6	30		
□□□□□□□□-□□□□ 255045	10	250	5	45		
□□□□□□□□-□□□□ 25030			6	30		
□□□□□□□□-□□□□ 30045	12	300	6	45		
□□□□□□□□-□□□□ 30030			9	30		
□□□□□□□□-□□□□ 35045	14	350	9	45		
□□□□□□□□-□□□□ 35030			12	30		



□□□□□□ □□□□□□□□□□

□□□□□□□ □□□□ □□ □□□ 230 □□□□ HTC □□□□□□□ □□□□□□□□ □□□□□ □□□ □□□□□□□ □□□□□

## Bush Hammer Plate

Each Roller is 45 Teeth

Connecting Hole

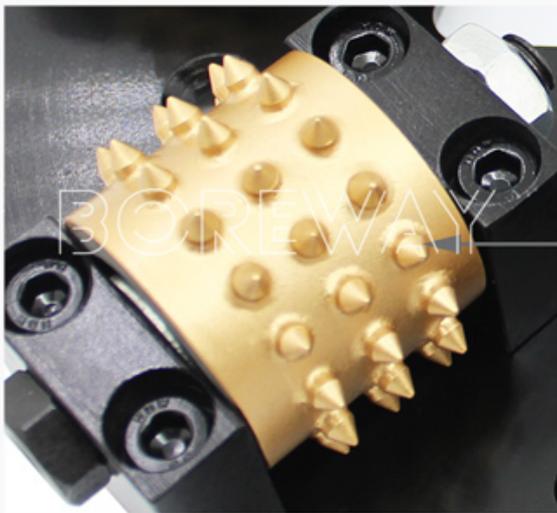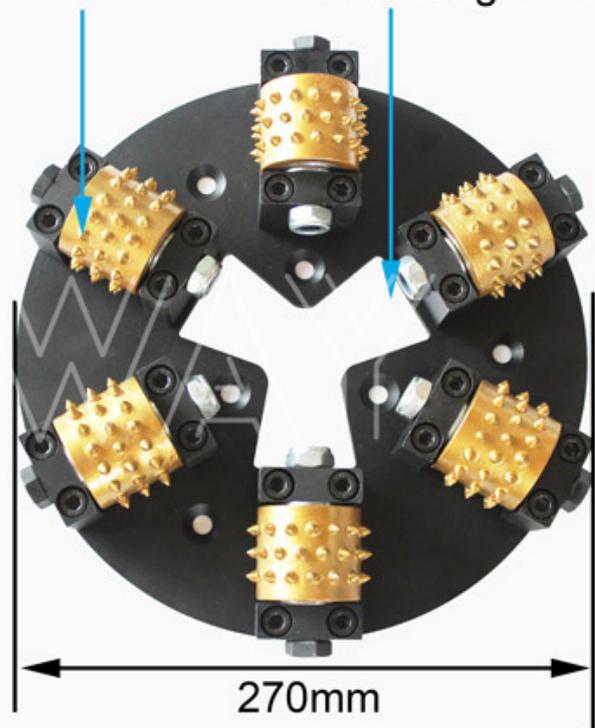

## High Grade

High grade diamond particle raw materials are used

# Multiple Options

There are options for imported bearings and ordinary bearings




# Customizable

It can be customized according to requirements

□□□□:

□□□□□□ □□□□, □□□□ □□□□□□, □□□□□□□□, □□□□□□□□□□, □□□□ □□□□□ □□ □□□ □□□ □□□ □□□□□□ □□□□□□

HTC □□□□□ □□□□□ □□ □□□□ □□ □□□ □□□□□ □□□□□□ □□□□□□

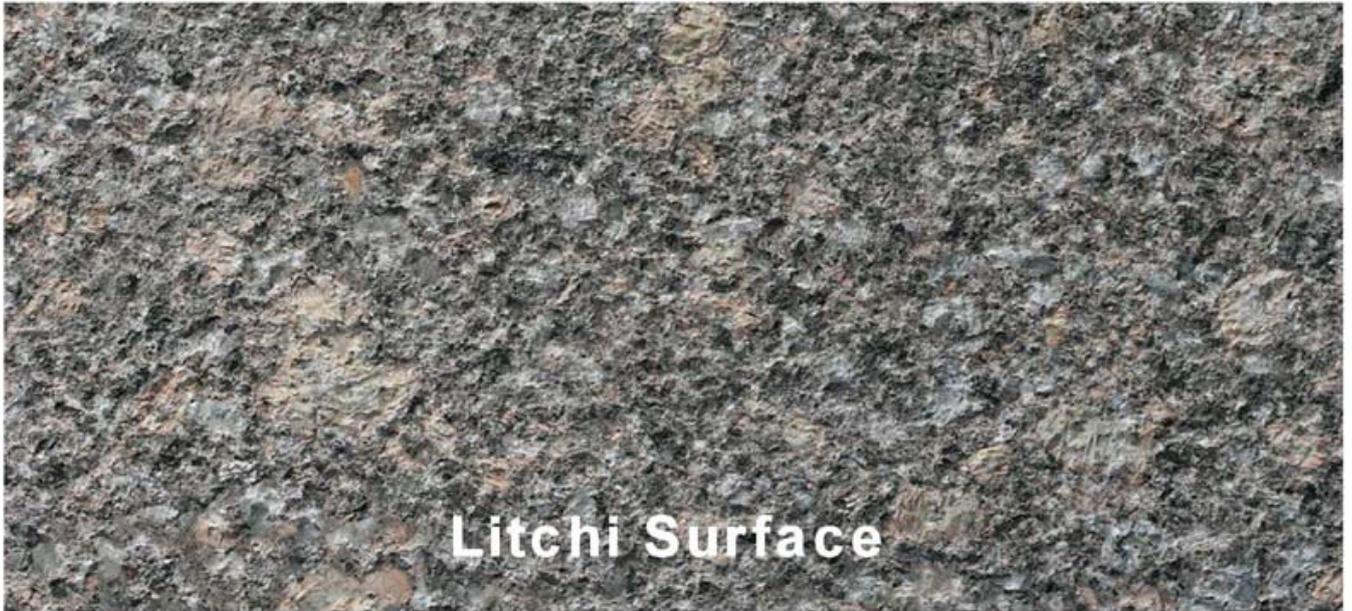

Litchi Surface



Marble



Granite



Quartz



Sandstone



Limestone



Concrete Floor



Asphalt Pavement



