



□□□□ □□□□□□□□ □□ □□□□□□ □□□□□ □□□□□□□□□ □□□ □□ □□□□□□□□□□ □□□□□□□□ □□□□ □□□□

[illegible]

000000 000000:

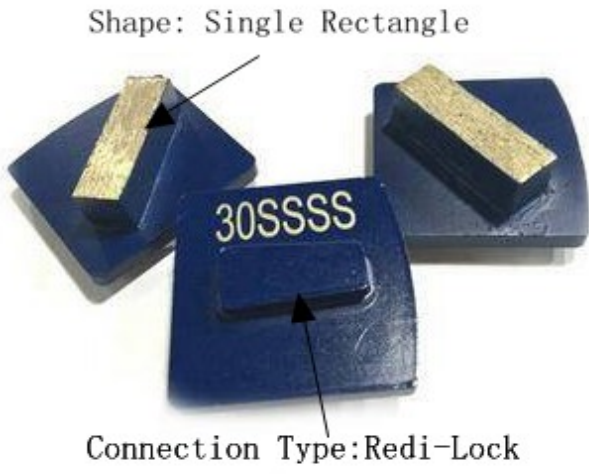
000000000000 0000000000 0000 0000 0000 0000 00000000 0000 000000:

0000:	000000 000000000000 0000 0000000000 000000000000
0000 000000:	16-270 # 00000
0000 000000:	1T
0000 000000 Shape	0000 0000 000000
0000000000:	00000 + 00000 000000
0000000000:	00000000000000000000 00000 00000000000
0000000000:	0000000000000000 00000 0000 / 0000000000000000 00000 0000
000000:	000000000000 / 0000000000000000 0000000 000000000000 00000000000000 00000
0000000:	00000 0000000 0000000, 0000000 0000000, 00000000 0000000, 0000000 0000000, 00000 0000000 0000000, 0000000000000 0000000 00000000

00000 00 00000 000000000000 000 0000 0000000 0000 00 0000000000 0000 00 0000000 0000000000 000000 0000 00 00 00000 0000 0000000000 000 00000 00000000000000000000 000 0000000000 0000000000



00000000 000000:

0000 0000 0000000 0000 0000000000 0000 000000:



0000 00 000000 000000000000 0000 000000 000000 0000, 00 00 0000 00 0000000 00 000000 000000

000000000000:

The image displays two circular components. The component on the left is a silver-colored circular base with a central white circular area. Three red components are attached to the base: one in the center and two on the right side. The component on the right is a black circular base with a white star-shaped cutout in the center. Eight white rectangular tabs are attached to the outer edge of the black base.

0000:

0000:

000000 0000-0000

000000 000000-000000

00000 00000-00000

00000: 000000000000 00000000

CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500–9000	5000–7000	4000–5000	3000–4000	1500–3500	1000–2000
MPA	C50–C65	C40–C55	C30–C50	C20–C40	C15–C25	C10–C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

00 0000 00 Redi Lock Blank

0000000000000 00000 0000 0000000, 00000000000 000000000000 00000 0000 00000000 00000

Scanmaskin Redi Lock Blank, Scanmaskin 0000000000000 00000 0000 000000000 00000



Husqvarna Redi Lock Blank Scanmaskin Blank

0000000 0000:

10 000000 00000, 0000 00000 00 00000, 000000000 00000000 00 0000000 00 00000000 00000000 00000

20 00 00 0000 00 00000000000 00 00000000000 00000 00 0000 00 00 00 000000000 00000000

0000-0000000000 00000 00 00000 00000000 00 0000 000000000 00000 0000 00;

0000-0000 00000 00 0000000 00000000 00 0000 000000000 00000 0000 00, 00 00000 000000000 0000000 0000000 00 0000000000 00;

00 000000000 00 00000 00 000000000 00 0000 00000 00000000 00 0000 00000 0000 00 0000 0000-0000 00000 00 0000000 00000 00 00000 00000 0000

- 2) 本公司 之 產品 之 品質 與 價格 均 係 本公司 之 競爭 優勢 之一 部分 也 本公司 之 產品 均 係 採用 最 優良 之 材料 製造 而成 且 價格 均 係 最 合理 之 價格 也
- 3) 本公司 之 產品 均 係 採用 最 優良 之 材料 製造 而成 且 價格 均 係 最 合理 之 價格 也 本公司 之 產品 均 係 採用 最 優良 之 材料 製造 而成 且 價格 均 係 最 合理 之 價格 也
- 4) 本公司 之 產品 均 係 採用 最 優良 之 材料 製造 而成 且 價格 均 係 最 合理 之 價格 也 本公司 之 產品 均 係 採用 最 優良 之 材料 製造 而成 且 價格 均 係 最 合理 之 價格 也

歡迎 垂詢 洽談：

Fujian Nanan *boreway*[®] Machinery Co.,Ltd.



No.605 Huahui 街, Shuitou 鎮 362342 Quanzhou, 福建省, 中國



電話: (+86) 595-86990206 /



WhatsApp: (+86) 595-86990220



WhatsApp / **WhatsApp** / 電話: (+ +) 13559599186



Email: boreway09@boreway.net



歡迎 垂詢 洽談