

00000:



00000000 00 00000000 000000 00 0000 00 000000 00000000 00000000 000000

0000 000000 00 000000 00000000 00 0000 00000000 0000 000000 Terrazzo 00000000 000000 0000 00 00000000000000 00000000 000000 00 0000 000000 000000 0000 00, 0000 00 0000000000, 0000000000 000000 00 0000 00 000000 000000 00 0000 000000 000000 000000 00, 0000 00000000 00 000000 000000 0 000000 000000

0000 000000 00 000000 00000000 00 0000 00000000 0000 000000 Terrazzo 00000000 000000 00 0000 00 0000 00000000, 000000000000 00 000000 0000000000 0000000000 00 0000 000000 0000

000000 000000:

00000000000000 0000000000 000000000000 0000 0000000000 00 **Terrazzo** 00000000 00 0000 00 0000 0000 000000 0000 000000:

00000000:	00000000 000000 000000
000000:	000 0000 0000
0000 00000000:	16-270 # 000000
0000 000000:	D25mm * H12.5mm * 2T
0000000000:	000000 00 000000 00000000
00000000000000:	3 000000 000 6 000 000 8 000 000000 0000
00000000:	0000000000 00 Terrazzo 00000000
00000000:	00000000 00000000000000 00000000000000 000000
00000000:	000000 00000000 00000000, 00000000 00000000, 0000000000 00000000, 00000000 00000000, 000000 00000000 00000000, 00000000000000 00000000 00000000


Product description and specifications text.

Product name and model information.

Product features and benefits text.

Two Round Segments

Size:D25mm*H12.5mm*2T

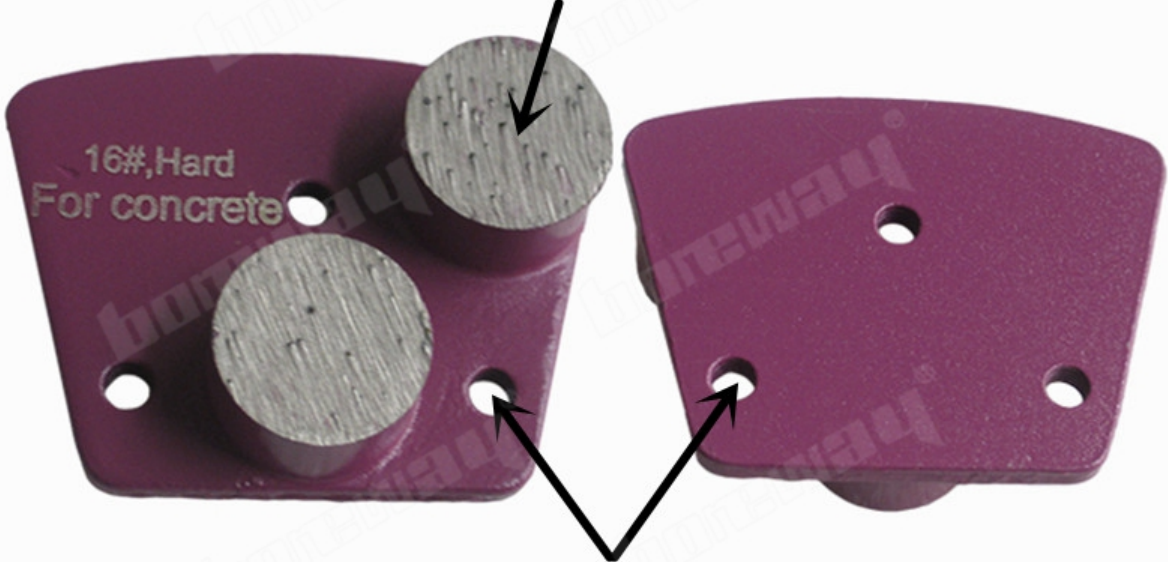








M6 or M8 or Bare Holes

Material: Diamond And Metal Powder

Concrete Floor Grinding

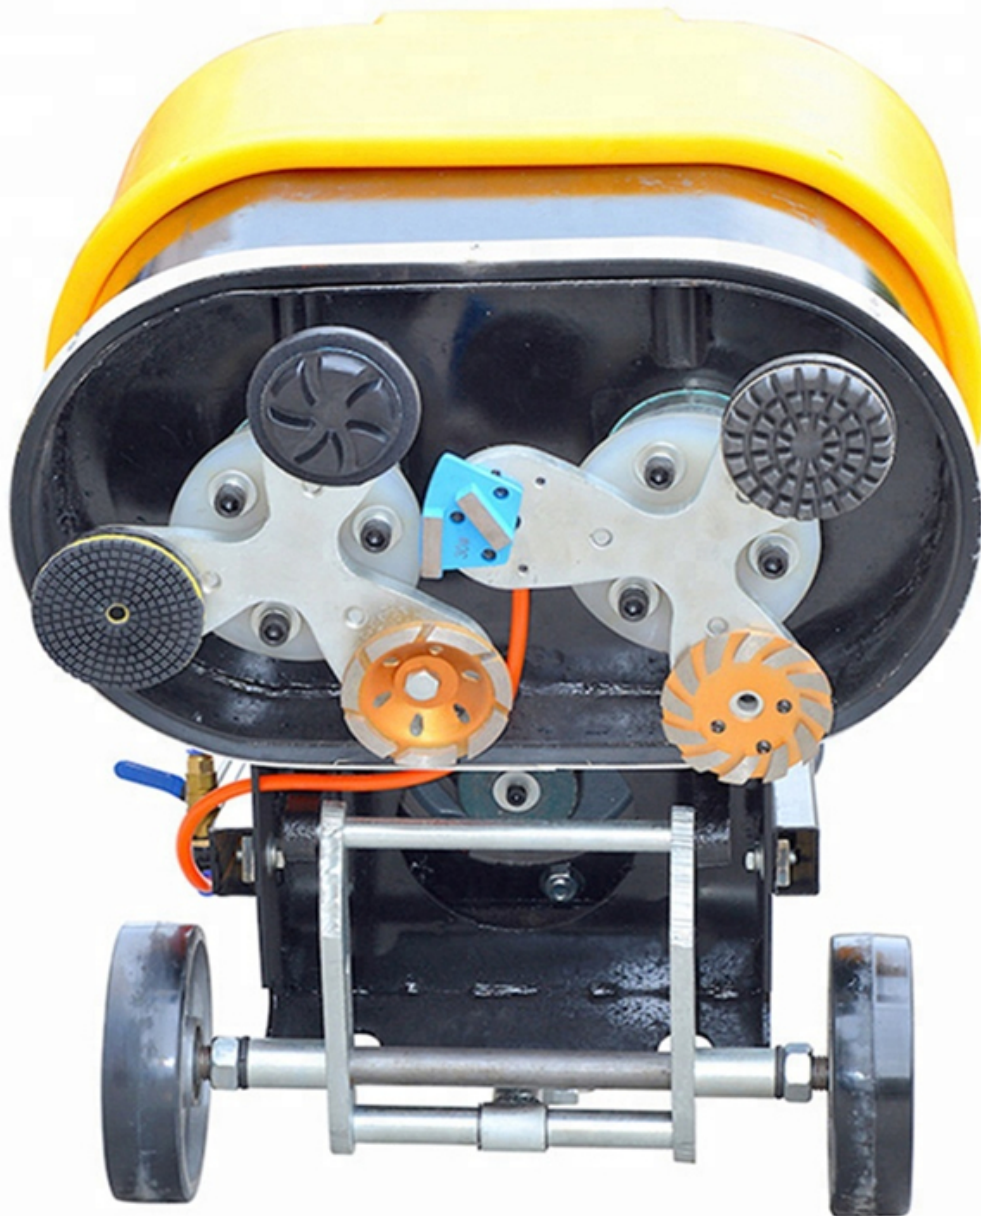METAL BOND DIAMOND GRINDING PLATES FOR HTC, LAVINA, HUSQVARNA CONNECTION:



CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

請注意：請根據材料硬度，選擇合適的鋼絲繩，鋼絲繩的直徑應與鋼絲繩的鋼絲直徑相匹配，鋼絲繩的長度應根據實際情況進行選擇。

鋼絲繩：

1. 鋼絲繩的直徑應與鋼絲繩的鋼絲直徑相匹配，鋼絲繩的長度應根據實際情況進行選擇。
2. 鋼絲繩的強度應根據實際情況進行選擇，鋼絲繩的強度應與鋼絲繩的鋼絲直徑相匹配。
3. 鋼絲繩的鋼絲直徑應根據實際情況進行選擇，鋼絲繩的鋼絲直徑應與鋼絲繩的鋼絲直徑相匹配。

鋼絲繩的直徑：

鋼絲繩的直徑應根據實際情況進行選擇，鋼絲繩的直徑應與鋼絲繩的鋼絲直徑相匹配。

鋼絲繩的鋼絲直徑：



Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

鋼絲繩的直徑應根據實際情況進行選擇

鋼絲繩的鋼絲直徑應根據實際情況進行選擇

鋼絲繩的鋼絲直徑應根據實際情況進行選擇

鋼絲繩的鋼絲直徑：

