


Redi Lock Two Segment Diamond Concrete Grinding Shoe For Husqvarna Machine

Advantages:

Two Segment Redi Lock Grinding Shoe

1. Venting holes for fast, dry or wet grinding with long life.
2. Grinding segments with heat treated steel bodies which provide increases durability and grinding life.
3. The high diamond concentration provides for a faster grinding rate while the high quality of the diamonds provides longer grinding life.

Boreway [Redi Lock Grinding Shoe Suppliers](#) feature fast and aggressive grinding and longest-lasting tool life. Single Rhombus Segment Concrete Grinding Pads. Once our proper product be choosed according to the coating you want to remove or the floor material to be grinded and polished ,you will witness its excellent removal rates and durability .Sumo Diamond tools always take pride in providing the maximum profitability and performance with all types of applications .

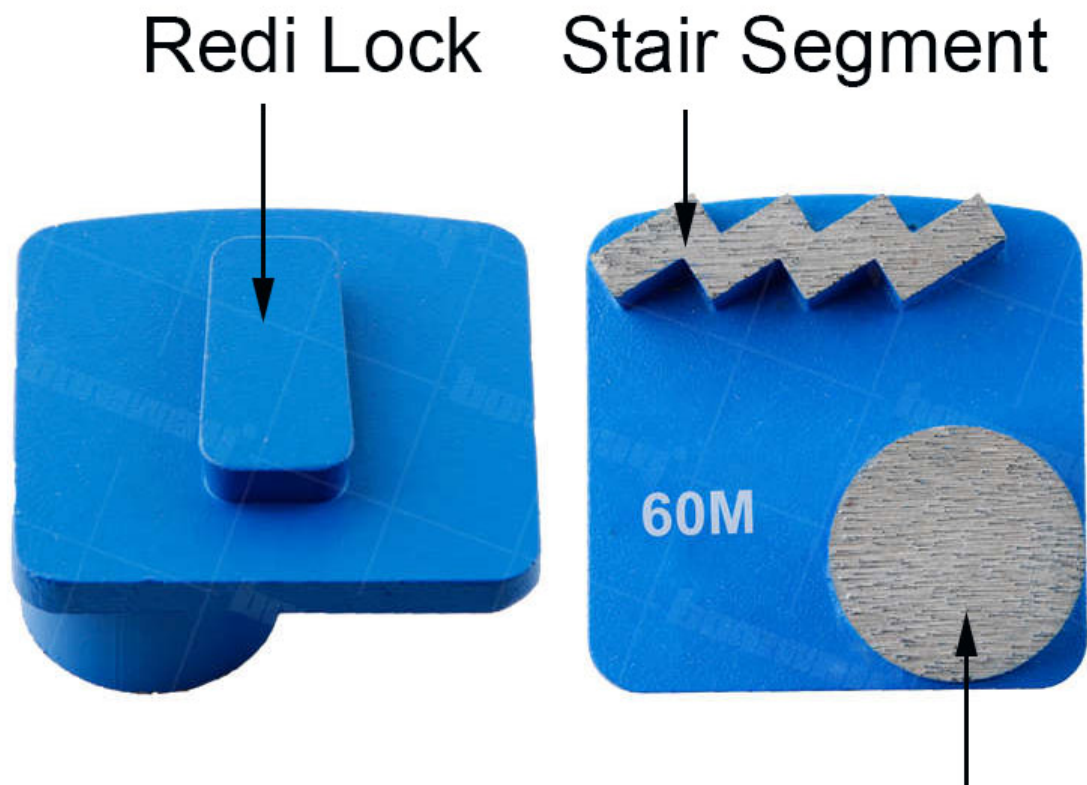


Round Segment

Segment Size: 33*17/8*13

Descriptions:

Diamond tools has developed a very broad range of metal-bond diamond tools to achieve maximum capacity at minimum cost and to suit most types of floor. Two Segment Redi Lock Grinding Shoe. The matching of various floors and bond is as follows.

Two Segment Redi Lock Grinding Shoe, Metal bond diamonds have high strength, excellent wear resistance, and a low friction coefficient. Metal bond diamonds high grinding efficiency and low grinding force generates less heat in the grinding process.

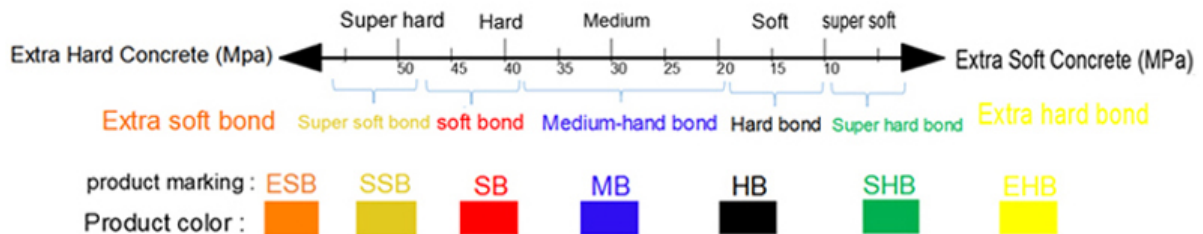

Soft Bond - The metallic powder in the sintered segment wears away quickly releasing dull diamond crystals exposing new abrasive crystals to cut efficiently. Best used on hard surfaces.

Medium Bond - A metal bond strength right between that of soft and hard bonds.

Hard Bond - The bond of the metallic powder in the segment wears away slowly and prevents premature wear against soft, abrasive surfaces.



Connection: Two Segment Redi Lock Grinding Shoe use for Husqvarna Grinder.

Grit: 6#, 16#, 20/25#, 30/40#, 50/60#, 70/80#, 80/100#, 120/150#, 200/220#, 325/400#

Applications: Chinese Wholesaler **Two Segment Redi Lock Grinding Shoe** suitable for general (concrete,stone) grinding use while mostly they are used for paint, glue, epoxy removal and floor coating, high quality and high efficiency, long lifespan.

Specification:

The normal size of **Two Segment Redi Lock Grinding Shoe:**

Usage:	Wet Or Dry Use
Machine:	Husqvarna Grinder
Type:	Trapezoid with Redi Lock
Application:	Concrete and Terrazzo Floor
Segment Shape:	One Round Amd Stair Segment
Grit No.:	6#,16#,20/25#,30/40#, 50/60#, 70/80#,80/100#,120/150#,200/220#,325/400#
Bond:	Very Soft Bond, Soft Bond, Medium Bond, Hard Bond, Very Hard Bond, Extreme Hard Bond

Other connection and specification can be customized according to need

Application:

Two Segment Redi Lock Grinding ,Other pads use for Husqvarna,werkmaster, Lavina, STI,HTC,Blastrac,scanmaskin ,klindex,EDCO grinders etc.



Two Segment Redi Lock Grinding,High quality diamond combain with excellent bond,which specialized design for very aggressive, high-performance, long life diamond

grinding tools.

Design for removing adhesives, thin mil coatings and leveling uneven spots or joints.


Effective, efficient grinding concrete floor restoration tools.

It's good to coarse grinding concrete surface quickly, remove bump, make the surface leveling

Also idea for the initial steps in concrete polishing procedures

Achieve maximum square footage at minimum cost.

Fits Lavina grinder machines on the market

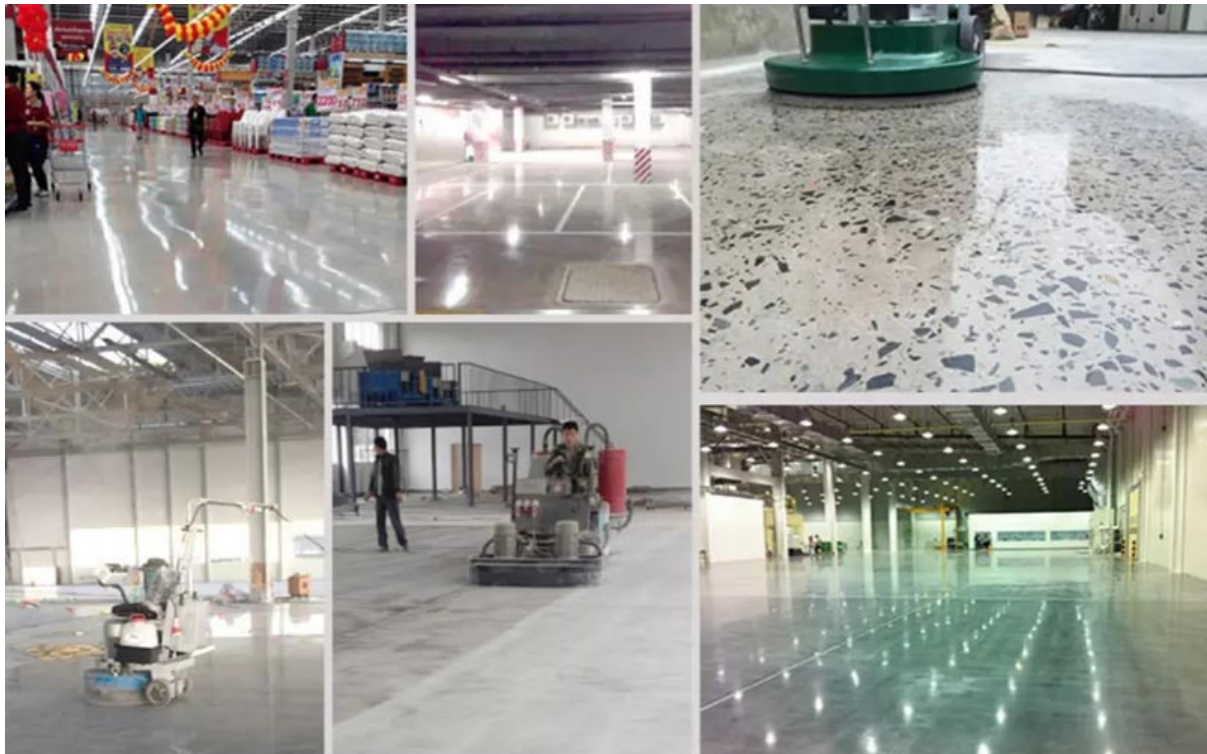

About Us:



Packing & Delivery:

PS:

- 1.Tools packing in carton cases
- 2.By Air/Sea for batch goods, Airport/Port receiving
- 3.Less than 45kg, generally delivery by express(Door to Door)
- 4.When tools are in large quantities, they are packing in wooden cases



- For sample or small orders, products could be sent by express, TNT, DHL, UPS, FedEx, EMS etc.
- For large orders, shipping by sea or air is recommended. By our long-term cooperate agent or your appointed forward.
- By sea, port of loading: Shanghai, Ningbo, Xiamen, Qingdao etc.



Logistics:

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours

Our Service:

- 1.Low MOQ: It can meet your trial order need well.
- 2.OEM Accepted: We can produce according to your sample or drawings.
- 3.Good Service: We treat our clients as God with high professionalism and passion.
- 4.Good Quality: We have strict quality control system. Good reputation in the market.
- 5.Fast Delivery: We have big discount from forwarder.

FAQ:

1.How could we know the quality, if we want to order your products?

Please just test them with a very small order, then you will know the quality. At present,so many people in the world to use Chinese products, because of the high quality and most competitive prices. We are professional manufacturer in supplying diamond tools for more than 8 years. Anyway, confirming our products quality, a small trial order for testing will be necessary.

2.Can you offer free samples?

We don't offer free samples, according to our many years experience, we think people get the samples by paying, they will cherish and appreciate more what they get. But we are willing to give our potential customers a special discount which they are used to do a testing. It is very important to give us feedback, we appreciate it.

3.Does your company accept custom-made?

Surely, we accept it. Including different color, grit etc. We also can mark your own logo and brand on the pad. Any new products you want us to produce for you, just send us your drawing or sample, we will produce the same one. We will not sell this kind of products to other customers only if we get your permission.

Contact Us:

Fujian Nanan **boreway** Machinery Co., Ltd.



No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China



TEL: (+86)595-86990206 /



Fax: (+86)595-86990220



Mobile/WhatsApp/Wechat: (+ 86) 18650679939



E-mail: boreway@boreway.com



Lyon Chang