

Le punte diamantate sono ideali per la rimozione rapida dello stock e per l'allineamento delle linee di seghe, progettate per tagliare granito, pietra ingegnerizzata e marmo. Solitamente montato su macchine CNC oa braccio radiale, per rettifica fori, ancoraggio e foro cieco. Centrare i fori di alimentazione dell'acqua in ogni punta. Solo per uso bagnato. [Cina Diamond Finger Bits Prezzo](#)


## Applicable materials




To meet your demands for cutting different materials, such as granite, marble, quartz stone, sandstone, microcrystalline stone, volcanic rock, concrete, glass, ceramics, masonry etc. Different segments recipe were been developed by our company.



Granite

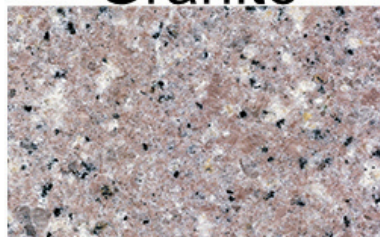


Marble

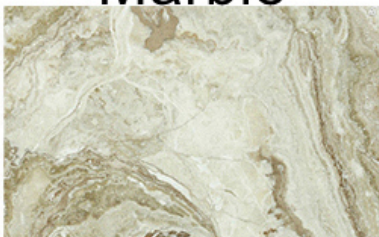

Concrete



Quartz stone

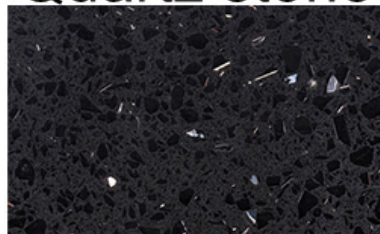


Sandstone



Volcanic rocks



# Product illustration

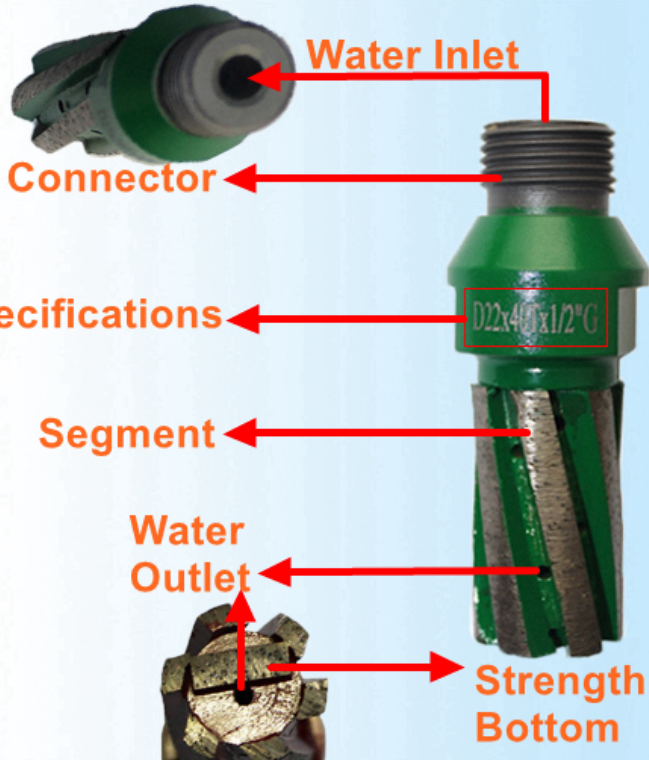


## Similar products details parameters




| Segmented diamond finger bits |                        |
|-------------------------------|------------------------|
| Diameter                      | 16mm,20mm,22mm,25mm    |
| Length                        | 30mm,40mm,50mm,60mm    |
| Grit                          | 30#,36#,40#,60#,120#   |
| Segment number                | 4-6个                   |
| Processing                    | Silver welding         |
| Connection                    | M14,M16,1/2"-G,5/8"-11 |

| Resin filled diamond finger bits |                        |
|----------------------------------|------------------------|
| Diameter                         | 16mm,20mm,22mm,25mm    |
| Length                           | 30mm,40mm,50mm,60mm    |
| Grit                             | 200#                   |
| Segment number                   | 4-6个                   |
| Processing                       | Resin filled           |
| Connection                       | M14,M16,1/2"-G,5/8"-11 |

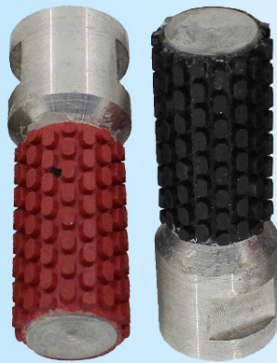

| Resin diamond finger bits |  |
|---------------------------|--|
| Diameter                  | 16mm,20mm,22mm,25mm                    |
| Length                    | 30mm,40mm,50mm,60mm                    |
| Grit                      | 50#,100#,200#,400#<br>800#,1500#,2000# |
| Processing                | Resin adhesive                         |
| Connection                | M14,M16,1/2"-G,5/8"-11                 |

| Vacuum brazed diamond finger bits |                        |
|-----------------------------------|------------------------|
| Diameter                          | 16mm,20mm,22mm,25mm    |
| Length                            | 30mm,40mm,50mm,60mm    |
| Grit                              | 30#,36#,40#,60#,120#   |
| Processing                        | Vacuum brazed          |
| Connection                        | M14,M16,1/2"-G,5/8"-11 |

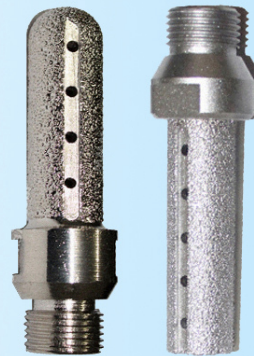

| Diamond screw core bits |                                   |
|-------------------------|-----------------------------------|
| Diameter                | 20mm                              |
| Length                  | 10mm,20mm,30mm                    |
| Grit                    | 40mm,65mm,100mm                   |
| Processing              | Silver welding                    |
| Connection              | Segment: M10, M12<br>Pipe: 1/2"-G |

Boreway Punta diamantate per saldatura a vuoto, argento o rame per la molatura di fori dopo punte da trapano, diametro: 25 mm 30 mm 35 mm 40 mm 50 mm 60 mm, lunghezza: 40 mm 50 mm 60 mm, materiali applicabili marmo, granito, quarzo, pietra artificiale e altra pietra. alle esigenze Shape.

**Per saperne di più sulla punta del dito, fare clic su: [Produttore di punta diamantata per uso bagnato](#)**

### **Vantaggio:**

I nostri prodotti esportano in Brasile, India, Australia, USA, Ucraina, Italia, Polonia, Russia, più di 20 paesi diversi. In questi mercati d'oltremare, le nostre speciali mole diamantate godono di una buona reputazione, riceviamo buoni feedback sui risultati dei test corrispondenti e anche una lunga durata. quindi, siamo fiduciosi nella qualità dei nostri prodotti.

## Packaging



# Shipping & Expressing



We co-operation with a number of express logistics, such as Debon, SF, EMS, TNT,DHL,UPS and so on.Please contact us if you want other express delivery. And fees will be charged according to the actual.

## Precautions


### Before use:

- 1.When grinding exerting less pressure , pressure or drilling too deep will cause slower speed.
- 2.Keep in a straight line for milling, drilling and milling cutter is best used at a 90-degree. Or substrate may break.
- 3.Please cool before removing finger drills for it produce a lot of heat when used.
- 4.Do not use the diamond milling cutter for drilling.Using the diamond drill bit if you want to drill.
- 5.Please use wear-resistant materials, such as bricks, grinding wheels to reuse the drilling and milling cutter blade.When the diamond finger bit could not move.

### After use:

- 1.First turn off the power, then remove the diamond finger bit.
- 2.Do not store in a humid environment, so as not to rust.

## Factory direct sales

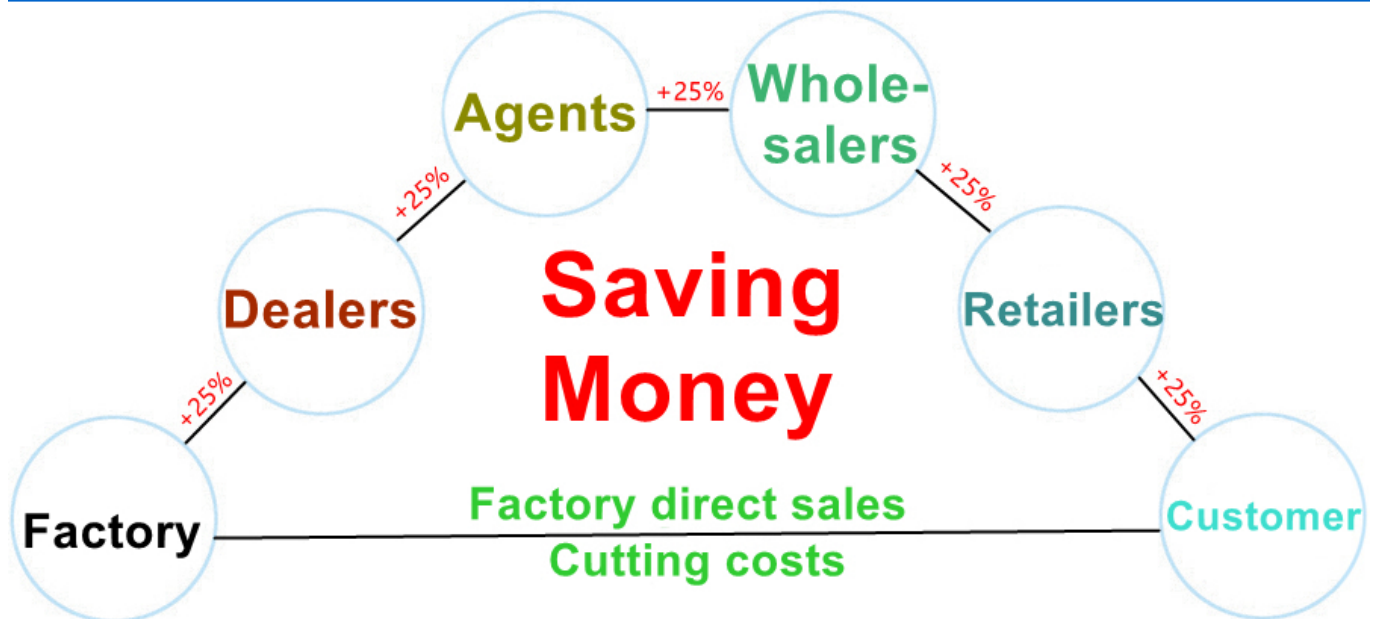

# common problem

## Size error



Due to some factors in the production process, the product may have a very small error doesn't affect the normal use.

## After-sales




If you have any questions, please do not hesitate to contact us, we will give you a detailed answer.

## Shipping



We co-operation with a number of express logistics, make sure the goods are in good condition and then signed.

## Aberration



Because the reasons for shooting light may have chromatic aberration, chromatic aberration is not quality problem.