




**Boreway** 150 mm



- 1
  - 2
  - 3.
  - 4
- = = = = OEM


**Key slot design**

1.Reduces the deformation of saw blade caused by cutting thermal expansion.

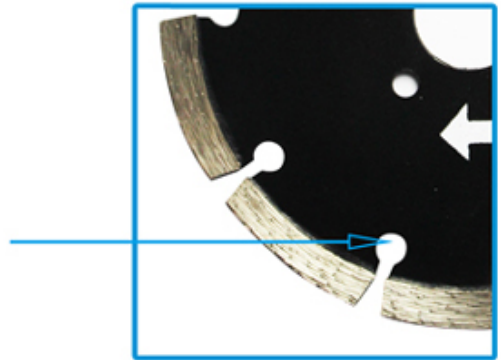

High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform



High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform



- 1

2. □□□□□□□□□□□□□□□□

3. □□□□□□□□□□□□□□□□

4. □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

**Our factory** use original high grade diamond


**Other factory** mix second diamond selected from waste segment



pk

**Our blade** cutting effect

**Other supplier** blade cutting effect

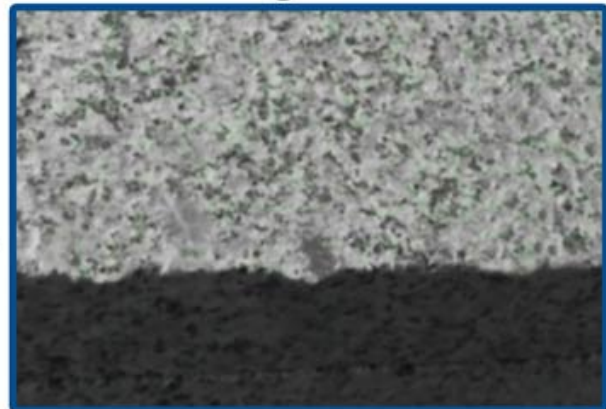

pk

□□□

□□□□□□□□ □□□□□□□□□□□□□□□□

|






2.

3.

4.



Non Slip Tile

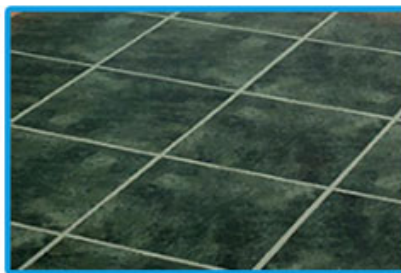

Floor Tile



Ceramic Tile



Concrete




Granite



Marble



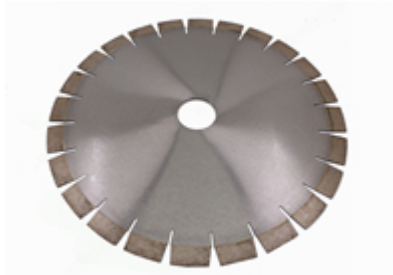

Boreway Machinery Co., Ltd.  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.com](http://www.boreway.com)

D350 \* 3.2 \* 20 \* 40mm \* 50 / 60mm Slient



Boreway Machinery Co., Ltd.  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.net](http://www.boreway.net)

40 \* 1200mm









□□&□□□

PS□

1.□□□□□□□□□□□□□□□□

□□□□□□2.Air / Sea□□□□□□/□□□□□□

3.45kg□□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□





