


150mm

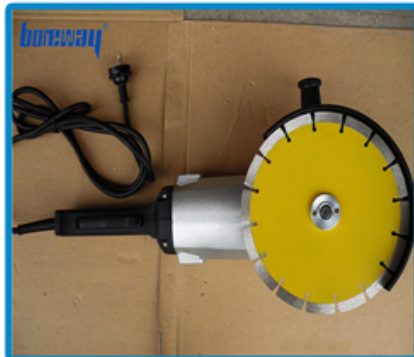

1



2

3

= OEM


Key slot design

1.Reduces the deformation of saw blade caused by cutting thermal expansion.

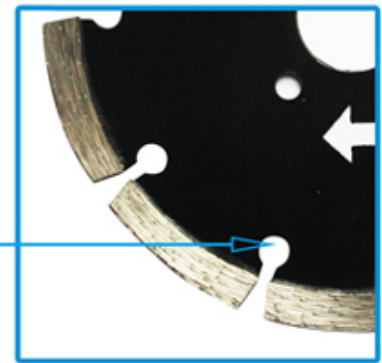

High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform



High purity low oxygen pre alloyed powder is used for cutter head carcass

- 1.Strong control and wear resistance;
- 2.The cutter head is not easy to break and deform

□□□

□□□□□□□□□□□□□□□□□□□□□□

1□ □□□□□□□□□□□□

2.□□□□□□□□□□□□□□

3.□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Our factory use original high grade diamond



Other factory mix second diamond selected from waste segment




pk

Our blade cutting effect




Other supplier blade cutting effect

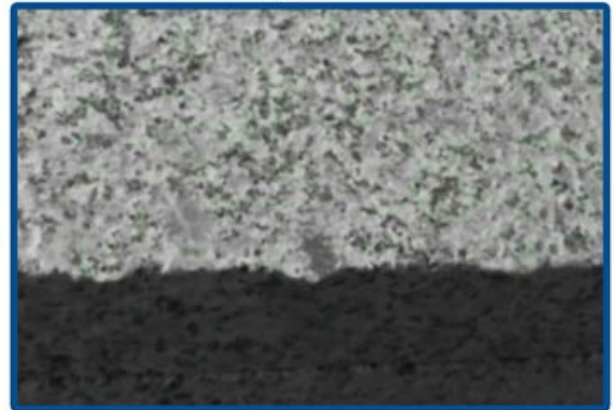

pk



● Cold Press Mschine



● Fill The Mold



● The Product Polishing





● Hot Press Machinery



● Remove The Mold



● Packing

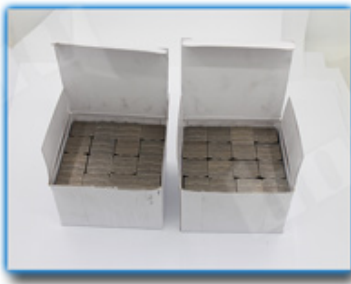

□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□



Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net



Boreway Machinery Co.,Ltd
www.fordiamondtools.com
www.diamondtools.top

□□□□□□□□□□□□□□□□

□□□□□□350mm□□□□□□□□□□□□

□□□□□□□□





□□&□□□

PS□

1.□□□□□□□□□□□□□□□□

□□□□□□2.Air / Sea□□□□□□/□□□□□□

3.45kg□□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□

XXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXX

XX
XXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXX

Fujian Nanan **boreway**[®] Machinery Co.,Ltd.

 No.605 Huahui Center Shuitou Town 362342 Quanzhou Fujian China

 +86 595-86990206 /  +86 595-86990220

 / **WhatsApp / Wechat** + 86 18650679939

 **E** boreway@boreway.com

 XXXXXXXX