□□□

□□□□□□□□□□□□ □□□□□□□□□□□□□

□□□□□□

□□□□□□□□□□□□□□□□□□□□□

Key slot design

1.Reduces the deformation of saw blade caused by cutting thermal expansion.

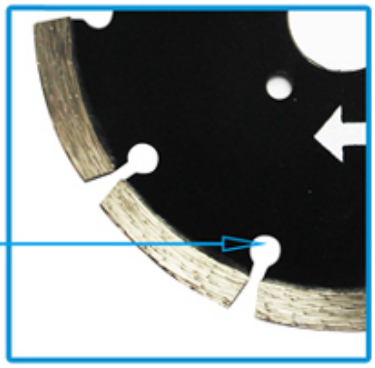



High purity low oxygen pre alloyed powder is used for cutter head carcass

1.Strong control and wear resistance;

2.The cutter head is not easy to break and deform



High purity low oxygen pre alloyed powder is used for cutter head carcass

1.Strong control and wear resistance;

2.The cutter head is not easy to break and deform

□□□□□□□□□

□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Non Slip Tile

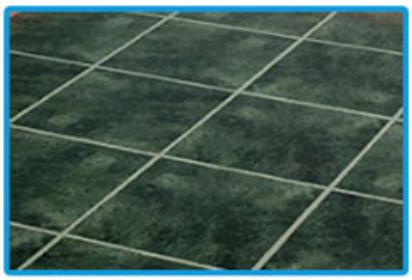

Floor Tile

Ceramic Tile

Concrete

Granite

Marble

□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□ □□□□ □□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□

boreway
Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

5□□□□□□□□□□□□□□□□□

boreway
Boreway Machinery Co.,Ltd
www.diamondtools.top
www.boreway.net

□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□

EDAX
D8

□□&□□□

□□□

1.□□□□□□□□□□□□□□□□□

□□□□□□2.Air / Sea□□□□□□/□□□□□□

3.45kg□□□□□□□□□□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□

1.□□□□□□□□□□□□□□□□□□□□□□□□□□□□

2□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□

3.□□□□□□OEM□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□

□□□□□□□□□□□□□□□□□□□