



BW-BH12514	5.	125	3.	14.	m M14 M16 5/8 "-11 40H-50H φ74-3* M8 □□□□	□□□
BW-BH12514			4	14.		
BW-BH12520			3.	20		
BW-BH12520			4	20		
BW-BH12530	5.	125	3.	30.		
BW-BH15014	6	150.	4	14.		
BW-BH12520	6	150.	4	20		
BW-BH15045	6	150.	3.	45.		
BW-BH15030			4	30.		
BW-BH20045	8.	200	4	45.		
BW-BH20030			6	30.		
BW-BH25045	10.	250	5.	45.		
BW-BH25030			6	30.		
BW-BH30045	12	300.	6	45.		
BW-BH30030			9	30.		
BW-BH35045	14.	350	9	45.		
BW-BH35030			12	30.		



□□□□□□□□□**150mm**□□□□□□□□□□□□□□□□□□□□□□□□

The inner diameters of common connectors for quick interfaces are 42mm, 45mm, 47mm, 50mm, etc.

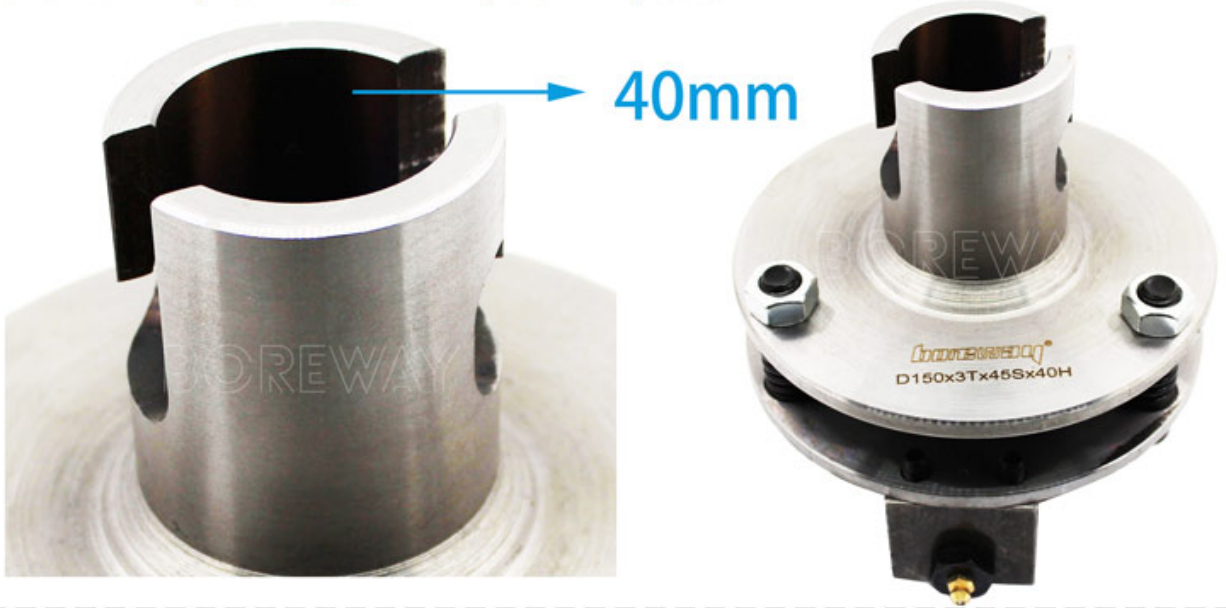


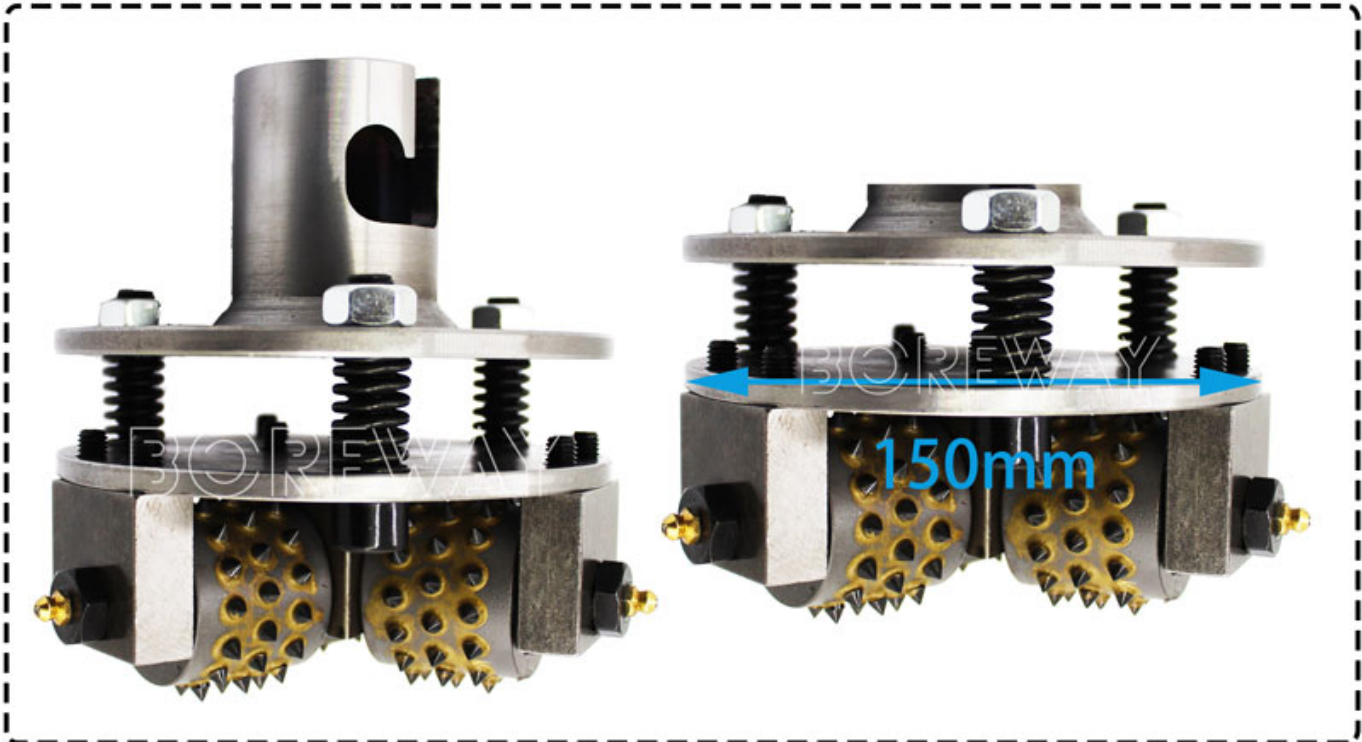

For cushioning & shock absorption



Spring

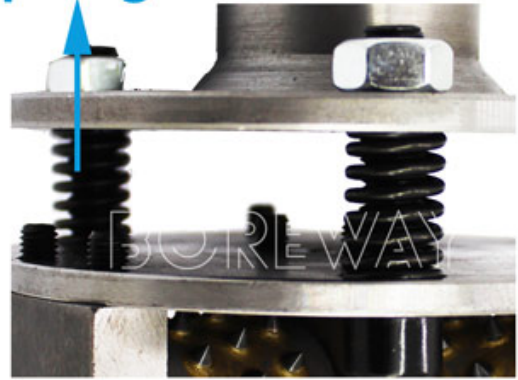



Used to put lubricating oil


Grease Nipple




□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□ □□□□□□□□□□□□

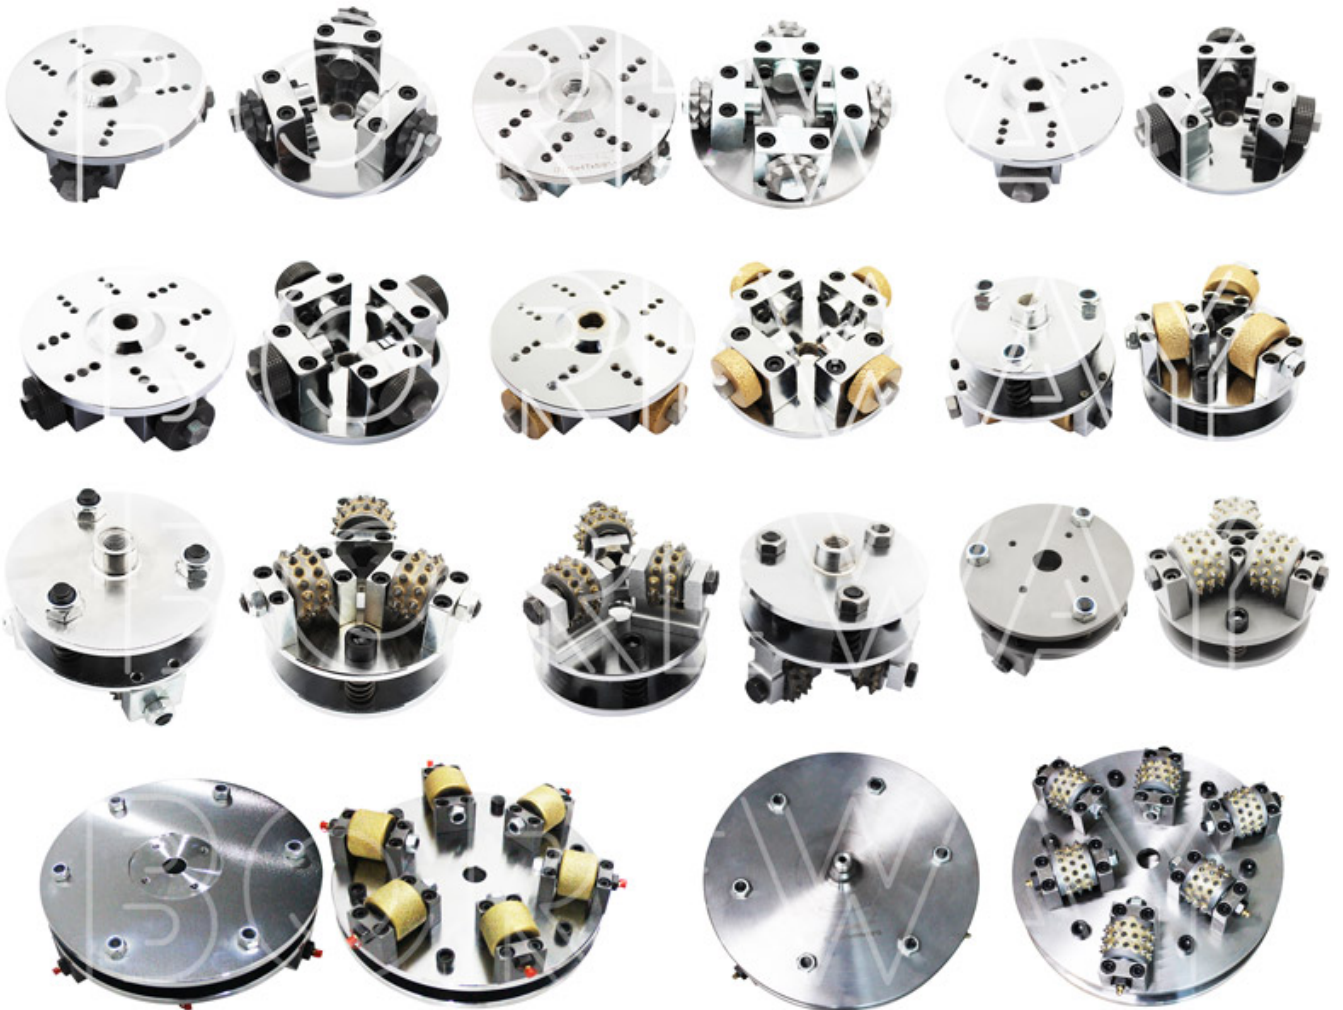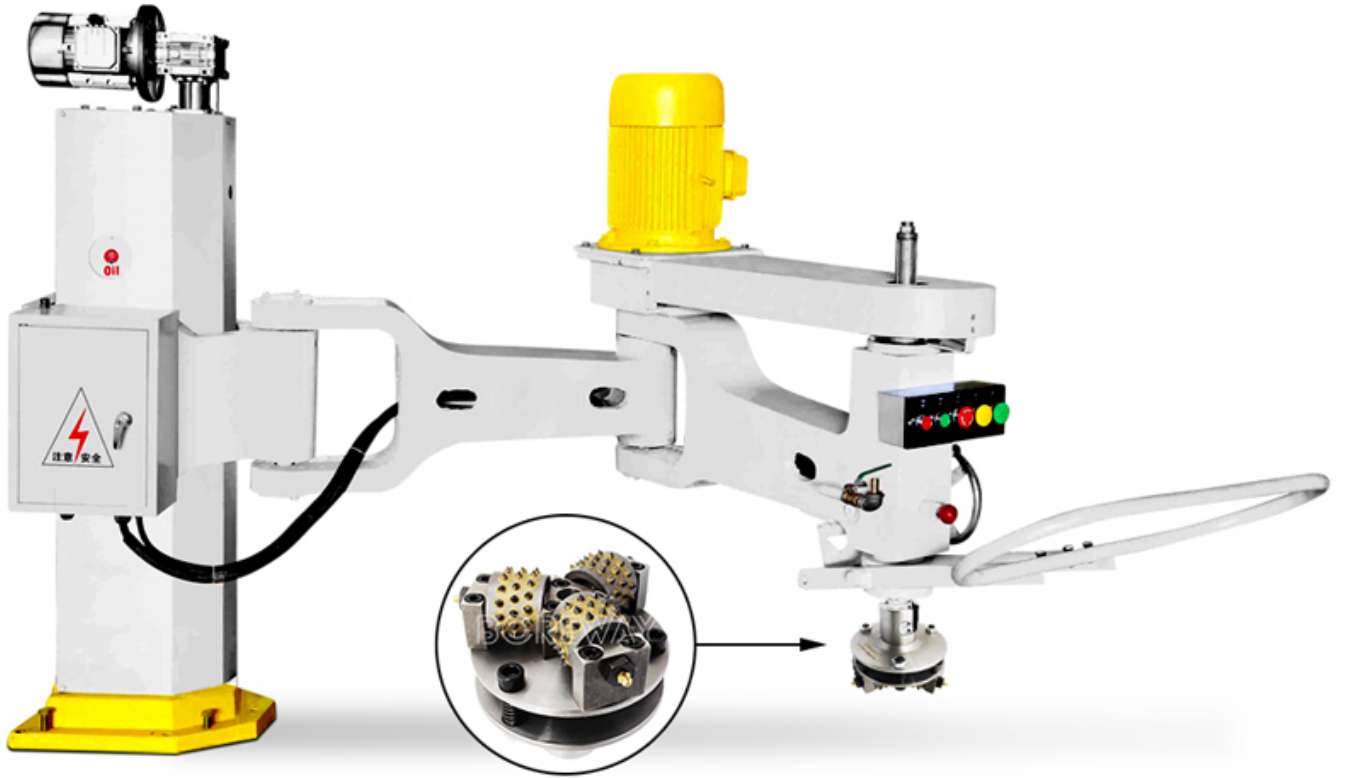

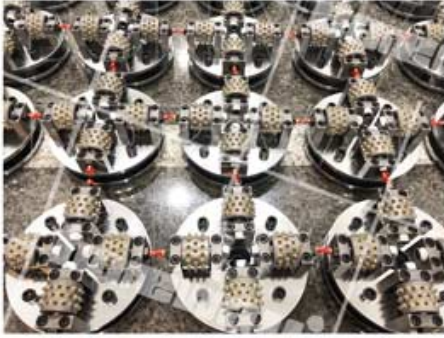

Marble



Granite



Quartz



Sandstone



Limestone



Concrete Floor



Asphalt Pavement



Fujian Nanan *boreway*[®] Machinery Co.,Ltd.



No.605 Huahui Center Shuitou Town 362342 Quanzhou, Fujian, China



Tel ☎ +86☎595-86990206 /  ☎☎☎☎☎☎+86☎595-86990220



☎☎☎☎/ **WhatsApp** / **WECHAT**☎☎+ 86☎ 18650679939



E☎☎☎☎ **boreway@boreway.com**



Lyon Chang