

**Expoxy resin**

Expoxy resin is a two-part system consisting of a resin and a hardener. When mixed in the correct proportions, they form a strong, rigid plastic. It is used for bonding, coating, and casting. The resin is a clear or yellowish liquid, and the hardener is a white or yellow liquid. The mixture is applied to the surfaces to be bonded and then cured with heat or light.


- Steps:
1. Mix the resin and hardener in the correct proportions.
  2. Apply the mixture to the surfaces to be bonded.
  3. Cure the mixture with heat or light.
  4. Remove the cured resin.

The curing time depends on the temperature and the thickness of the resin. It can range from 20 minutes to several hours. The cured resin is very strong and resistant to wear and tear.

**Table**

	Model	Grain Size	Material	Quantity
Diamond Resin Resin	BW DGB	6 # 16 #, 25 # 36 #, 40 # 30 # 100 80 # 60 # 50 # #120 # 150 # 200 # 170 #	Diamond Resin Resin HTC PCD	100 100 100 100

Expoxy resin is a two-part system consisting of a resin and a hardener. When mixed in the correct proportions, they form a strong, rigid plastic. It is used for bonding, coating, and casting.

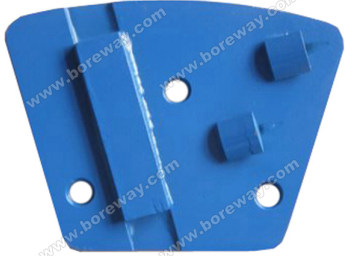

Boreway Machinery Co., Ltd.  
www.diamondtools.top  
www.boreway.com





Boreway Machinery Co., Ltd.  
www.diamondtools.top  
www.boreway.com



Boreway Machinery Co., Ltd.  
www.diamondtools.top  
www.boreway.com



Boreway Machinery Co., Ltd.  
www.diamondtools.top  
www.boreway.com

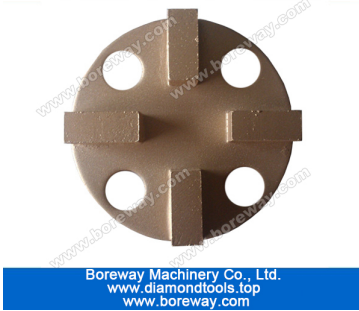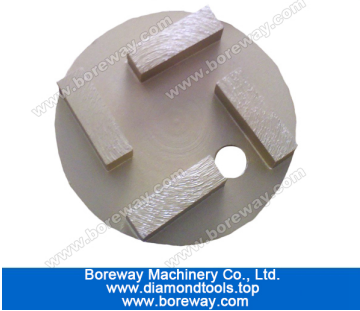

- :
1. □□□□□□□□□□□□□□□□□□□□□□
  2. □□□□□□□□□□□□□□□□
  3. □□□□□□□□□□□□□□□□□□□□□□

□□

□□□□□□□□□□□□□□□□□□  
 □□□□□□□□□□□□□□□□□□□□□□□□□□  
 □□□□□□□□□□□□□□□□□□

**boreway**®



**Boreway Machinery Co., Ltd.**  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.com](http://www.boreway.com)



越南 Nanan 越南 Boreway 越南

地址: 越南平阳省顺泰市顺泰工业区

邮编: 362342

**TEL:** (+86) 595-86990206/(+86) 18250633812

电话: (+86) 595 86990220

**WhatsApp:** + 86-18359335376

联系人: ChoisDong

邮箱: [borewa05@boreway.net](mailto:borewa05@boreway.net)