




Three Hexagon Segment Trapezoid Grinding Pads

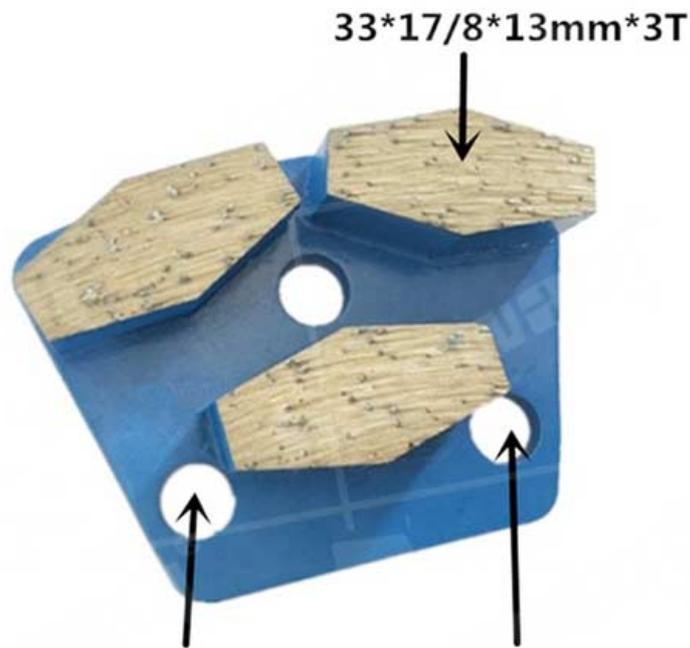

Connection: 3 X M6 or M8 or Bare Holes

Suitable for general (concrete, stone) grinding use while mostly they are used for paint, glue, epoxy removal and floor coating, high quality and high efficiency, long lifespan.



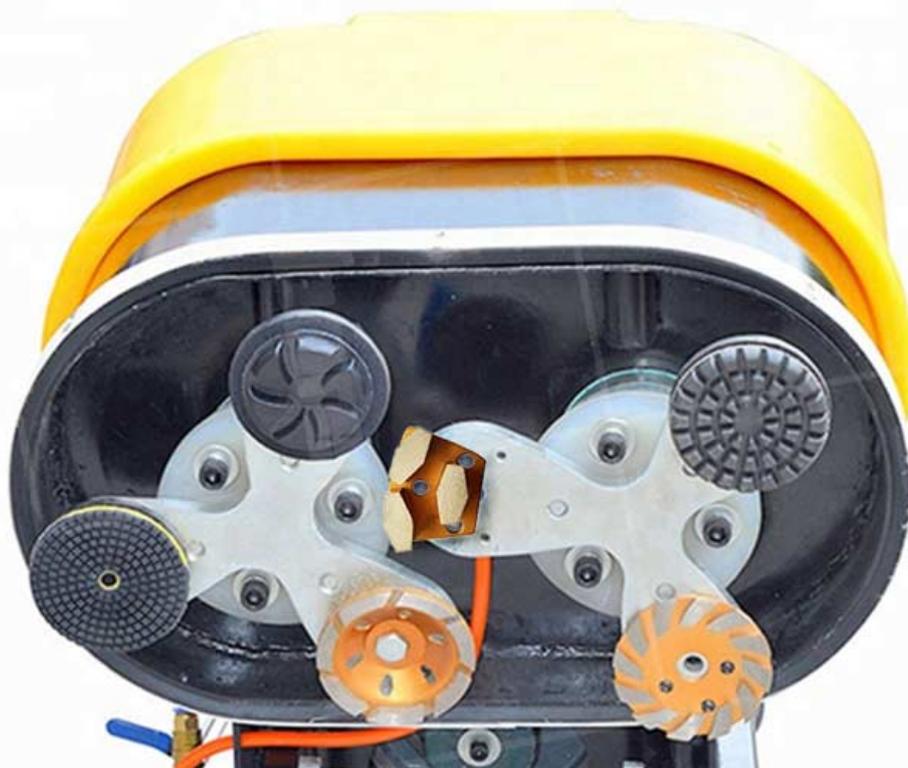


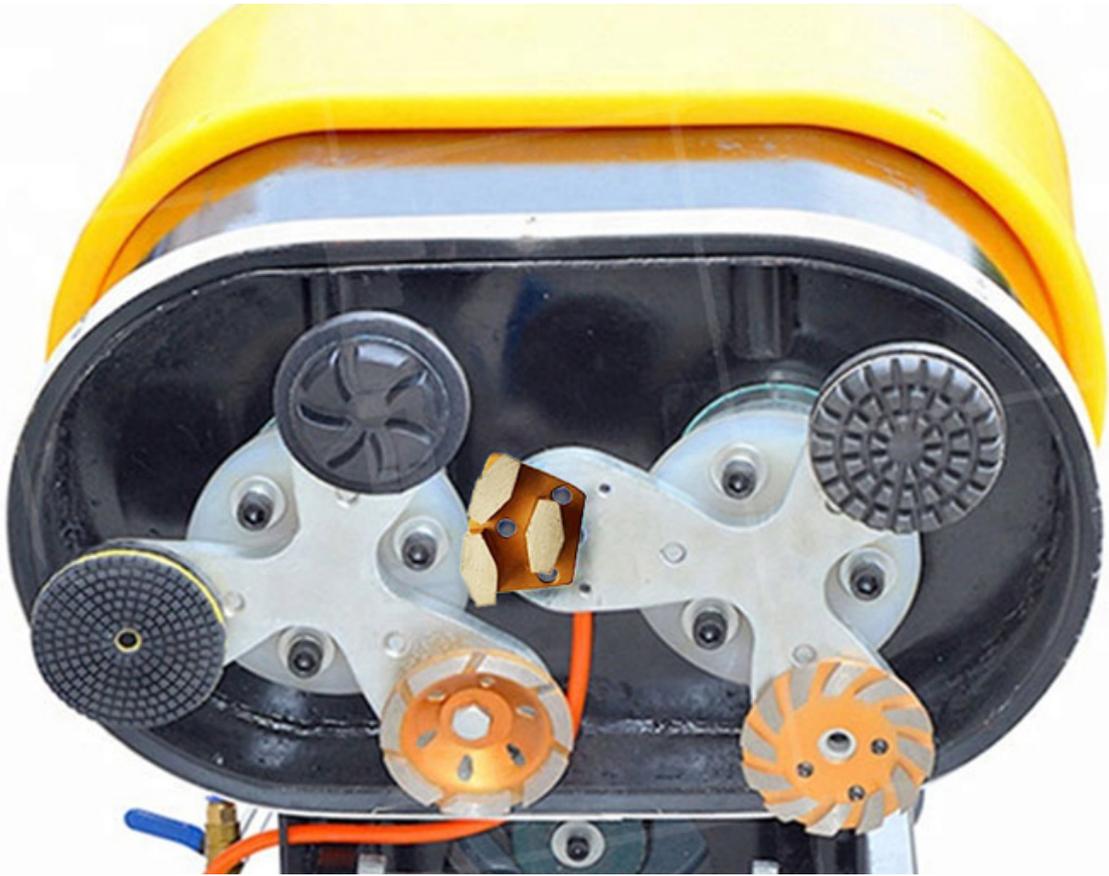


3 X Bar Hole



3 X M6/M8 Thread Holes


CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

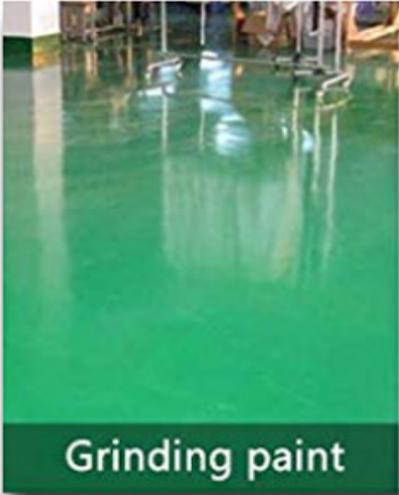

Grinding paint



Ground

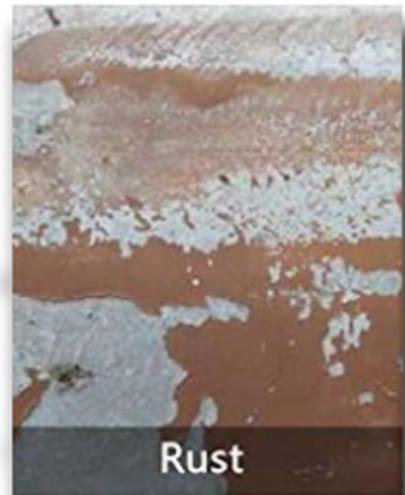

Rust

□□□□□□□□



□□□□□□

PS□

1.□□□□□□□□□□□□□□□□

2.□□□□□□□□□□/□□□□□/□□□□□□□□

3.45kg□□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Fujian Nanan *boreway*® Machinery Co.,Ltd.



No.605 Huahui Center Shuitou Town 362342 Quanzhou Fujian China



TEL ☎ +86 595-86990206 /  ☎ +86 595-86990220



☎ / **WhatsApp** / **Wechat** ☎ + 86 18650679939



E ☎ **boreway@boreway.com**



☎