□□□

2□□1 PCD□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□
□□□□□□

□□□□□□□□□□□□□□□ □□VCT□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□sed□

□□□

□□□□□□□□□□ □□□□□□□□□□□□□□□□□

□□	□□□□□□□□□□□□□□□
□□□□□□□□□□	16-270□etc□
□□□□□ □□□□	1/4 PCD * 2T + 40 * 10 * 5mm * 1T
□□□□	2□□PCD□□□□□□□□□
□□□	□□□□□□□□□□□□PCD□□□□□□□□□
□□□	□□□□□□□□□□□□
□□□	□□□□□□□□□□□□
□□□	□□□□□□□□□□□□□□□□□□
□□□□	□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□

□□□□□

□□□□□□□□□□□□□□□□

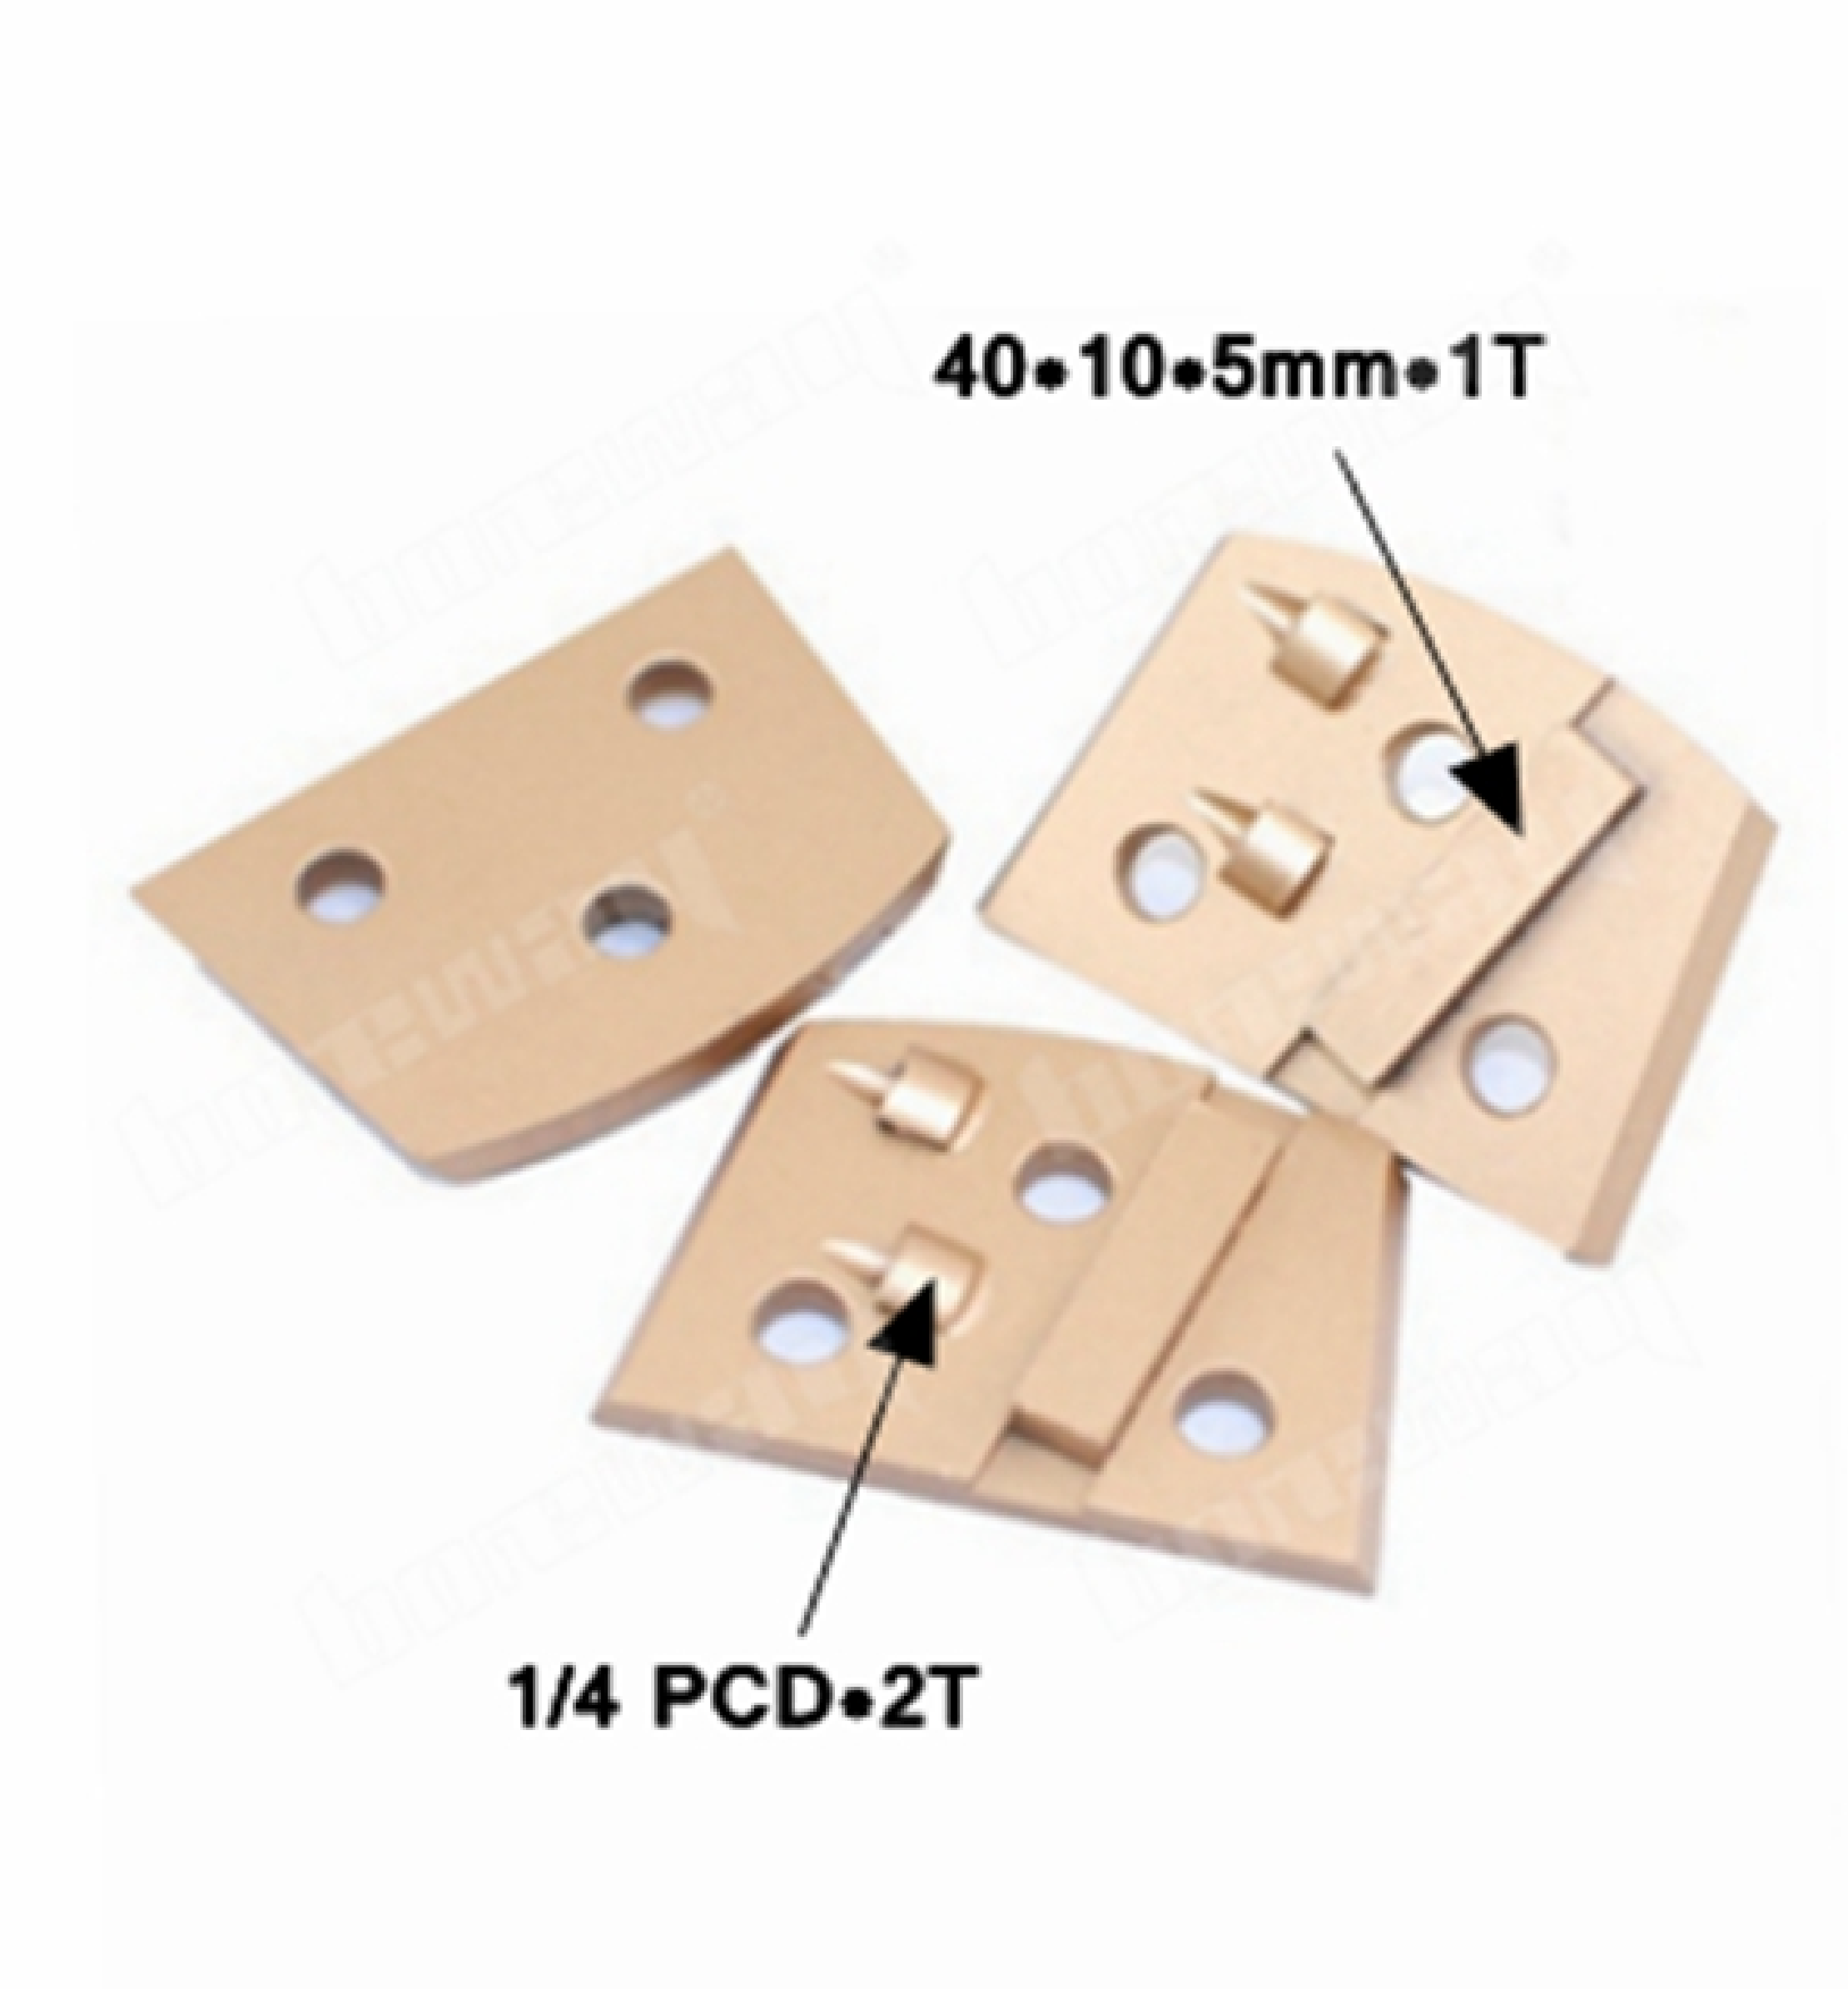
40•10•5mm•1T
1/4 PCD•2T

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□

□□□□□□□□□□□□□□□□ □□□
□□□□□□□□□□□□□□□□

□1□□□16□□24□□30□□36□□
□□□

□2□□□□46□□50/60□□60/80□□100□
□□□

□3□□□□□□□□120□□150□□180□□200□□270□

Application

Before Grinding and Polishing

After Grinding and Polishing

[illegible]

CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

[illegible] [illegible]

[illegible]

3[illegible]

[illegible]1[illegible]

[illegible]2[illegible]3[illegible]M6 / M8[illegible]

□□□

1□□□□□□□□□□□□□□□□□□□□

2□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

3□□□□□□□□□□□□□□□□□□□□□□□□□□□□

4□□□

□□□

□□

□□□□

[□□□□□PCD□□□]

[Lavina Three PCD□□□□□□□□]

□□□□□□□□□

[illegible]

1.[illegible]
2[illegible]
3.[illegible]OEM[illegible]
4.[illegible]
5[illegible]

[illegible]

1.[illegible]
[illegible]
[illegible]
[illegible]
[illegible]8[illegible]

□□□

□□□□□□□□□□□□□□□□□
□□
□□
□□
□□

3.□□□□□□□□□□□□□□□□□□□
□□
□□
□□□
□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□

1.□□□□□□□□□□□□□□□□□□□
2.□□□□□□□□□□□□□□□□□□□□
3.□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□

Fujian Nanan boreway Machinery Co.,Ltd.
□□□□□□□362342□□□□No□□□□605□
TEL□ □+86□595-86990206 / □□□□□□ □+86□595-86990220
□□□□/ WhatsApp / Wechat□ □+ 86□ 13559599186
E□□□□ boreway05@boreway.net
□□□□□□□