Boreway 1600MM Fast Cutting Granite M Shaped Segment for Granite Circular Cutting Disc

Advantage:

- 1) **1600mm fast cutting granite m shaped segment** change the single grinding for cutting grinding and the blade, the combination of optimization of the cutting performance.
- 2) Good sharp degree of the cutting tools, cutting speed, cutting efficiency is high.
- 3) Good wear-resisting coefficient, long service life, high performance/price ratio, and integrated.
- 4) Fast cutting, cutting, stitching cut out of stone material surface smooth, uniform size.

Feature:

- 1) **1600mm fast cutting granite m shaped segment** diamond sheet feed and (Ti + Cr + Ni + Co, etc.) to form chemical bonds, can reduce the threshing, improve the edge, extend the service life.
- 2) A large number of exported to eastern Europe, North America, South America, Middle East, Australia and other overseas markets; Product quality is unanimously recognized the overseas customers.

Specification:

The following are normal specifications 1600mm fast cutting granite m shaped segment:

					<u>, </u>		
Diameter(mm)	Thickness(mm)	Teeth(pcs)	L	W	Н	Hole(mm)	Max. RPM
3500mm,140inch	9.0(10.0)	180	24	13.0/12.0	20/30	100/120	250

Blade Set	Blade Diameter	Thickness	Segment Size	Cutting Stone	
#	#	mm	LxWxH	#	
Multi Size	2200-600 Multi	4.5	24x6.4/5.6x13H(15H)	Granite	
Multi Size	2200-600 Multi	5.0	24x7.0/6.2x13H(15H)	Granite	
Multi Size	2200-600 Multi	5.5	24x7.4/6.6x13H(15H)	Granite	
Multi Size	2200-600 Multi	6.5	24x8.4/7.6x13H(15H)	Granite	
Multi Size	2500-800 Multi	5.5	24x7.4/6.6x13H(15H)	Granite	
Multi Size	2500-800 Multi	6.5	24x8.4/7.6x13H(15H)	Granite	
Multi Size	2500-800 Multi	7.2	24x9.2/8.4x13H(15H)	Granite	
Multi Size	1600-960 Multi	6.5	24x8.4/7.6x13H(15H)	Granite	
Multi Size	1600-960 Multi	7.2	24x9.2/8.4x13H(15H)	Granite	
Single Size	40"/1000mm	4.5-5.0	24x7.0/6.2x13H(15H)	Granite	
Single Size	48"/1200mm	5.0-5.5	24x7.5/6.5x13H(15H)	Granite	
Single Size	64"/1600mm	6.5-7.2	24x9.2/8.4x13H(15H)	Granite	
Single Size	48"/1200mm	4.0	24x5.5x8H(10H)	Marble	
Single Size	48"/1200mm	4.5	24x6.0x8H(10H)	Marble	
Single Size	48"/1200mm	5.0	24x7.5x8H(10H)	Marble	
Single Size	48"/1200mm	5.5	24x8.0x8H(10H)	Marble	
Single Size	64"/1600mm	6.5-7.2	24x9.2x10H(8H)	Marble	
Single Size	64"/1600mm	6.5-7.2	24x9.5x13H(10H)	Marble	

The above specifications is only for reference, other specifications may be available as per customer's demand.

Support Sample Processing Customization

Style and Specifications



Contact Salesman

Due to the large number of product specifications and styles,in order to avoid conflicts,please contact the salesman before placing the order.

Provide Samples

The manufacturer supports the sample processing and customization, and the buyer provides the sample first to communicate the production requirements.



2



Mail Samples

According to the buyer's demand for proofing, the manufacturer needs the buyer to pay the proofing fee first, and the sample fee will be returned after the order is concluded.

Generate Order

The buyer receives the sample. If satisfied, place an order for batch production. After confirming the receipt, contact the salesman to return the proofing cost.



Factory=Quality Control=Competitive Price=Own technology=OEM

Note:

Cutting of the cutting tools to add some water, and water flow, make it a better cooling effect.

Otherwise required for composite saw blade speed in 280-320 revolutions per minute, car speed away too fast!

Product Details:

1600MM Fast Cutting Granite M Shaped Segment



Example:

Stone is soft and abrasive therefore we would use a hard bonded blade. Reinforced concrete with river pebble aggregate is hard therefore we would use a soft bonded blade.

Hard Bond

Means that the compilation of metals when sintered together forms a segment of approximately 105 to 120 HRB (hardness) and is very resistant to the soft abrasive materials being sawn, thus releasing diamond at the appropriate rate.

Hard bonds typically consist of the following metal powders – cobalt, iron, tungsten carbide and are grey to dark grey in colour.

Soft Bond

Means that the compilation of metals when sintered together forms a segment of approximately 90 to 105 HRB (hardness) and allows the segment to wear quicker thus retaining diamond on the cutting surface.

Soft bonds typically consist of the following metal powders - copper, bronze and cobalt, and are generally bronze to light silver in colour.

Applications:


1600mm fast cutting granite m shaped segment using in block cutting for 900-3500mm circular saw blades for block cutting Diamond segment cutting granite, sandstone, various hard stone with quartz. Hot press v shape diamond segment only wet use








For Block Cutting of Granite, Sandstone, Slate, Kinds of Hard Stone with quartz

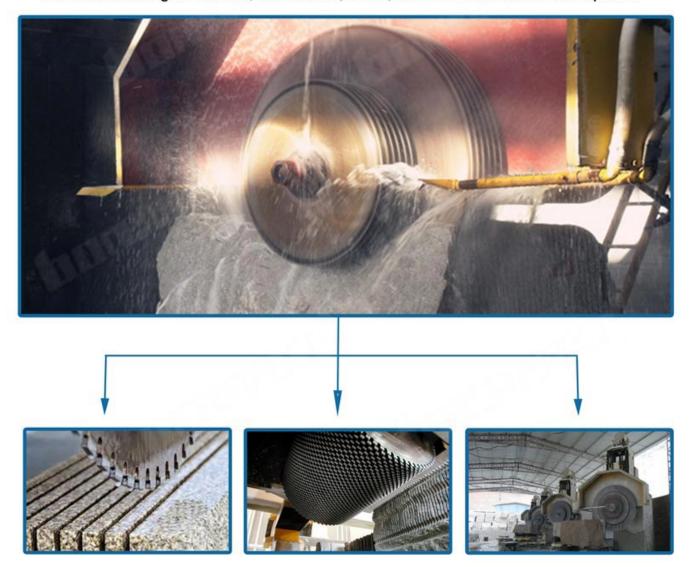

One is single size multi cutter, which all blade sizes in same thickness and diameter while the other is multi size multi cutter, two sizes or more different size diameter blades used together in one stone machine.

Applications machine:

M step diamond blade segment in indian market used for single or multi circular saw blade from 900mm to 3500mm, cutting of granite, sandstone, various hard stone with quartz.

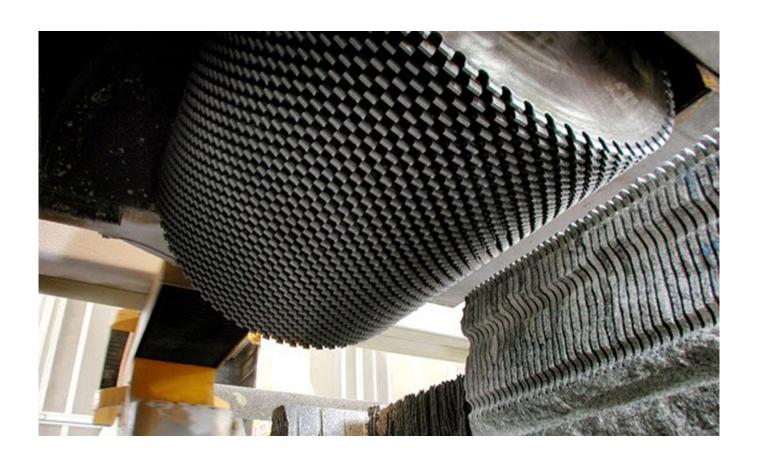

Our factory use original high grade diamond

Other factory mix second diamond selected from waste segment






Our blade cutting effect

Other supplier blade cutting effect





- 1. If the material is hard, the bond of the diamond segments should be softer.


 Because diamonds will become blunt when cutting hard material. Softer bond can be worn down with the blunt diamonds faster, then make new diamonds beneath be more easily exposed to participate in cutting
- 2. If the material is relatively softer, the bond should be harder.

The diamonds can last longer in this care. The harder bond wears slower, so that it can hold the diamonds also longer. This can make better use of the diamonds and prolong the diamond tool's service life.

Applications machine:

Welding method: **M step diamond blade segment in indian market** silver welding by high frequency welding machine

High frequency silver welded machine is recommended instead of welding by fire. Don't weld diamond segment for a long time, just a few minutes, otherwise the diamond inside might be damaged because of the high temperature, which will affect the cutting performance of the granite segment greatly.

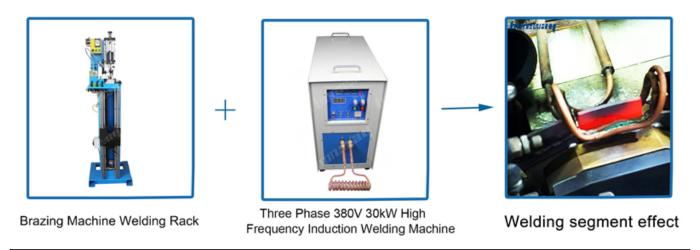

Related Products:





About us:





Packing & Delivery:

- Tools packing in carton cases;
- When tools are in large quantities, they are packing in wooden cases.



Less than 45kg, generally delivery by express(Door to Door).













By Air / Sea for batch goods, Airport / Port receiving.









Our service:

- 1. Low order quantity: It can meet the test order you need.
- 2. Fast delivery: We get great discounts from freight forwarders.
- 3. OEM Acceptable: We can produce according to your samples or drawings.
- 4. Good quality: We have a strict quality control system. Has a good reputation in the market.
- 5. Good service: We regard our customers as God with a high degree of professionalism and enthusiasm.

FAQ:

1. If we want to order your product, how do we know your quality?

You can test with a small order, and then you will know the quality. Nowadays, many people in the world use Chinese products because of their high quality and high cost performance. We are a professional diamond tool manufacturer with more than 8 years of manufacturing experience.

2. Can you provide samples for free?

We do not provide free samples. Based on years of experience, we believe that customers

will want them because of their reliable quality. By purchasing samples, we will cherish and appreciate them and make them get more. We are ready to offer our potential customers a special discount on samples. It's very important that you give us feedback, and we will appreciate it.

3. Does your company accept customization?

Of course, we accept customization. Including different colors, cutting objects, etc. We can also tag your own label and company brand. If you want us to make any new products for you, just send your products to us. Whether it's drawings or samples, we have the ability to produce the same products. We will not sell these products to others, only customers can get permission.

Please note:

Please use high frequency Silver Welded machine instead of Fire to make the brazing, the welding time is only a few seconds, otherwise the diamond inside the segments will probably be damaged by the high temperature, then the cutting performance will be Reduced!

Contact us:

Fujian Nanan homeway Machinery Co.,Ltd.

No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China

TEL: (+86)595-86990206 / 🗣 **Fax:** (+86)595-86990220

Mobile/WhatsApp/Wechat: (+ 86) 18650679939

E-mail: boreway@boreway.com

Lyon Chang