

## Descriptions:



### **Rhombus Arrow Segments Double Pins Concrete Grinding Block For Concrete Terrazzo Floor**

**Single Segment Two Pins Grinding Shoes** metal bond diamonds have high strength, excellent wear resistance, and a low friction coefficient.

**Single Segment Two Pins Grinding Shoes** metal bond diamonds high grinding efficiency and low grinding force generates less heat in the grinding process.

## Specifications:

The following are normal specifications Single Segment Two Pins Grinding Shoes:

Name:	Single Segment Two Pins Grinding Shoes
Segment Grit:	16-270#etc.
Material:	Diamond And Metal Powder
Application:	Concrete and Terrazzo Floor
Connection:	Two Pins Redi Lock Connection
Machine:	Two Pins Quick Connceting Grinding Machine
Bond:	Very Soft Bond, Soft Bond, Medium Bond, Hard Bond, Very Hard Bond, Extreme Hard Bond
Size:	35*20*10*1T/2T (Rhombus Segments) 24*14*8mm*1T (Arrow Segment)

Specially designed tools are available for any standard application. We can Tailor your tools to your specific needs.

**Product Details:**

**Single Segment Two Pins Grinding Shoes:**

Single Arrow Segment

24\*14\*8mm\*1T




Rhombus Segments

35\*20\*10\*1T/2T



Application: Concrete and Terrazzo Floor

Two Pins Blank

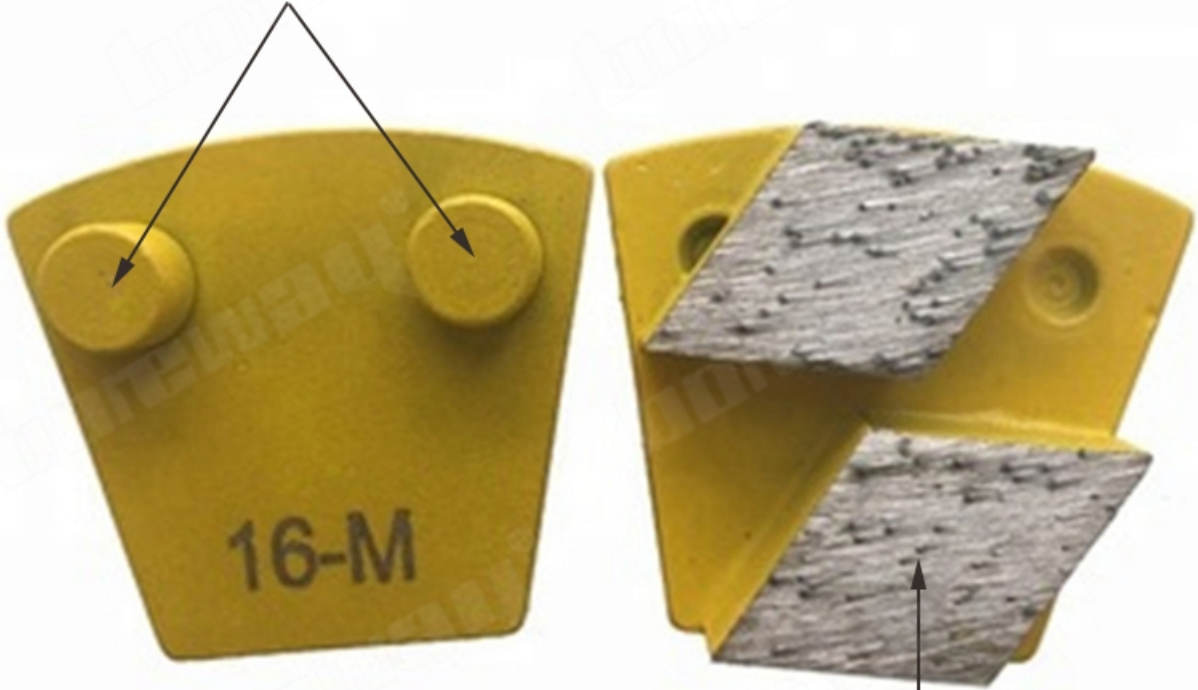

35\*20\*10\*2T

Rhombus Segments



[If you are interested in our products, you can click on me.](#)

#### Applications:

**Single Segment Two Pins Grinding Shoes** suitable for general (concrete, stone) grinding use while mostly they are used for paint, glue, epoxy removal and floor coating, high quality and high efficiency, long lifespan.

(1) Coarse grit: 16#, 24#, 30#, 36#.

Could be used for un-even concrete floors, rough grinding preparation on floor or old floor renovation.

(2) Medium grits: 46#, 50/60#, 60/80#, 100#


Could be used for all kinds of concrete and terrazzo floors, grinding preparation on floor or old floor renovation.

(3) Fine grits: 120#, 150#, 180#, 200#, 270#

Could be used for all kinds of concrete and terrazzo floors , find grinding preparation on floor or old floor renovation before polishing.

**Choosing between soft, medium, and hard bonds.**

1. Soft Bond (Yellow) - The metallic powder in the sintered segment wears away quickly releasing dull diamond crystals exposing new abrasive crystals to cut efficiently. Best used on hard surfaces.
2. Medium Bond (Red) - A metal bond strength right between that of soft and hard bonds.
3. Hard Bond (Black) - The bond of the metallic powder in the segment wears away slowly and prevents premature wear against soft, abrasive surfaces.

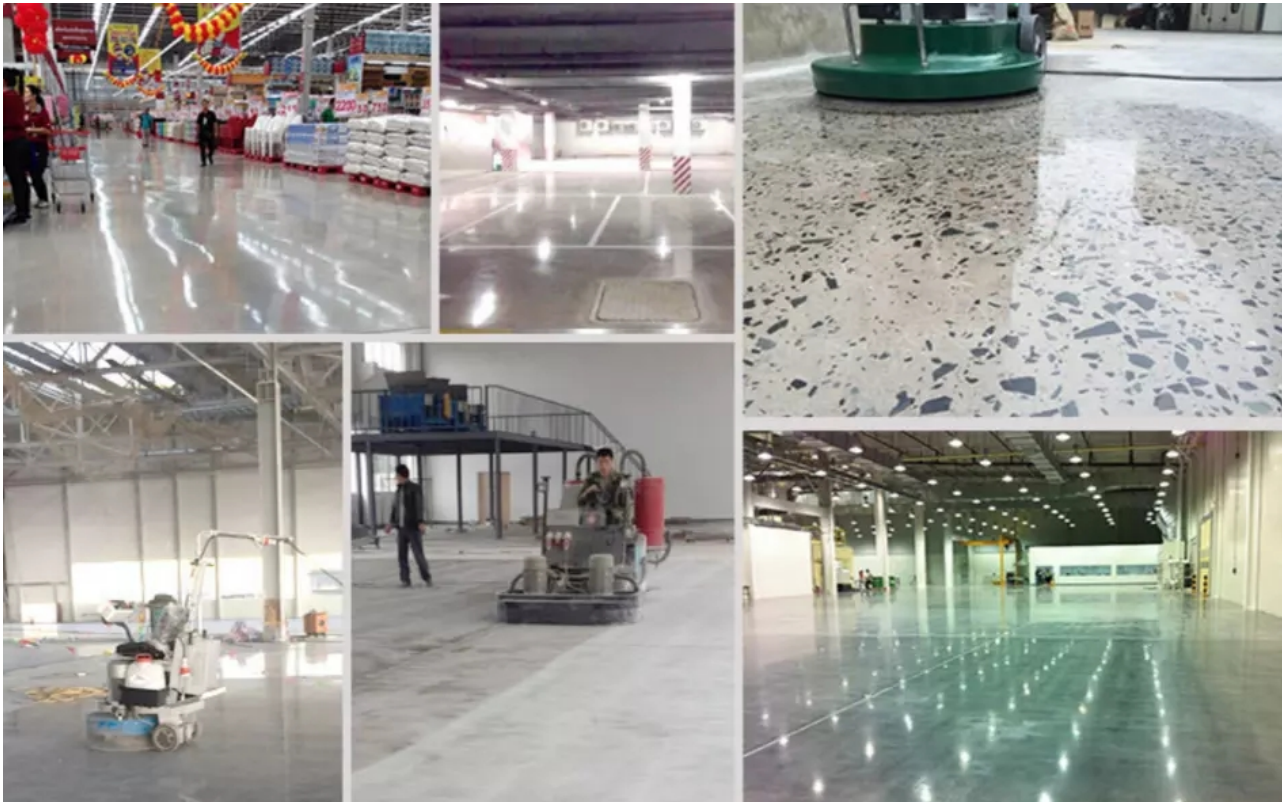



**Before Grinding and Polishing**



**After Grinding and Polishing**

**Color:**

CONCRETE HARDNESS	Xtreme Hard	Very Hard	Hard	Medium Hard	Soft	Very Soft
PSI	6500-9000	5000-7000	4000-5000	3000-4000	1500-3500	1000-2000
MPA	C50-C65	C40-C55	C30-C50	C20-C40	C15-C25	C10-C20
CODE	XHF	VHF	HF	MHF	SF	VSF
COLOUR						

**Note:** Special logo, segment size and shapes, installation are available by customer's request.



**Two Round Pins Redi Lock Blank**



**Two Square Pins Redi Lock Blank**

### **Two Pins Redi Lock Blank:**

1. Two Round Pins Redi Lock Blank.
2. Two Square Pins Redi Lock Blank.

#### **Advantage:**


- 1) Lasts much longer than competitive products and will not glaze.
- 2) Combination of superior diamonds and an extremely durable and unique matrix.
- 3) Removes stock quickly and efficiently to greatly reduce your product and labor cost.
- 4) Single Segment Two Pins Grinding Shoes amazing results on most types of concrete from soft to very hard.

#### **Features:**

Single Segment Two Pins Grinding Shoes excellent wear resistance, lower cost, better surface finish etc.

#### **Related Products:**





Boreway Machinery Co.,Ltd  
www.diamondtools.top  
www.boreway.net

Boreway Machinery Co.,Ltd  
www.diamondtools.top  
www.boreway.net

## Two Pins Diamond Grinding Block Two Pins Metal Bond Diamond Grinding Block

### About us:



### Our service:

1. Low order quantity: It can meet the test order you need.
2. Fast delivery: We get great discounts from freight forwarders.
3. OEM Acceptable: We can produce according to your samples or drawings.
4. Good quality: We have a strict quality control system. Has a good reputation in the market.
5. Good service: We regard our customers as God with a high degree of professionalism and enthusiasm.

### Description:

#### **1. If we want to order your product, how do we know your quality?**

Please test in a very small order and then you will know the quality. Now, so many people in the world use Chinese products because of their high quality and high quality.

competitive price. We are a professional diamond tool manufacturer.

In any case, for more than 8 years, confirm the quality of our products, small test orders will be tested necessary.

#### **Can you provide samples for free?**

We do not provide free samples. Based on years of experience, we believe that people will get them.

By paying for samples, we will cherish and appreciate the more they get. We would have been

Be prepared to offer our potential customers a special discount for participating in the test. It is very important to provide feedback to us and we will be very grateful.

#### **3. Does your company accept customization?**

Of course, we accept it. Includes different colors, gravel, etc. We can also tag your own logo and the brand on the board. You want us to produce any new products for you, just send us your products.

Drawing or sample, we produce the same. We will not sell such products to others. Only customers can get a license.

### Please note:

1. Please provide items before purchase.
2. Please provide the model number before purchase.
3. Other specifications can be customized according to requirements.

### Contact us:

Fujian Nanan **boreway** Machinery Co.,Ltd.

 No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China

 **TEL:** (+86)595-86990206 /  **Fax:** (+86)595-86990220

 **Mobile/WhatsApp/Wechat:** (+ 86) 13559599186

 **E-mail:** [boreway05@boreway.net](mailto:boreway05@boreway.net)

 **Kelly Huang**