


## description:

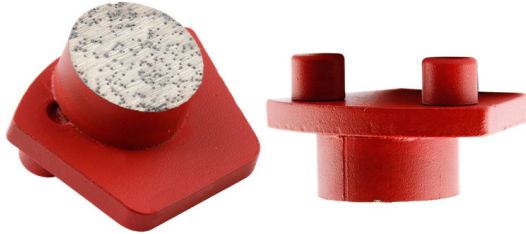

Boreway Machinery Co.,Ltd  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.net](http://www.boreway.net)

### **Single Round Segment Two Pins Floor Disc Metal Grinding Block For Werkmaster Floor Grinder**

**Single Round Segment Two Pins Werkmaster Disc** are the best solution for large areas of thin coating removal, leveling and smoothing high spots in concrete, and work very well for concrete cleaning.

## Advantage:

- 1. Segment No.:** one round segment
- 2. Bond:** soft, medium and hard bond
- 3. Segment Thickness:** 12mm, 10mm
- 4. Bond:** Extra Soft, Super Soft, Soft, Medium, Hard, Super Hard, Extra Hard
- 5. Application:** Suitable for grinding and polishing Terrazzo, marble, granite, concrete's surface
- 6. Grit No.:** 6#, 16/18#, 20/25#, 30/40#, 50/60#, 70/80#, 80/100#, 120/150#, 200/220#, 325/400#

**Werkmaster Diamond Metal Bond Grinding Pad** can be designed into a variety of different shapes of single segment or double segments, also can be customized according to the customer's special shape and specific numbers of segments

Two Types of Werkmaster Two Pins Redi Lock Blanks

Two Types of Werkmaster Two Pins Redi Lock Blank, Perfect Fit in Werkmaster Concrete

Grinding Machine.

Type 2 : Trapezoid Shape Werkmaster Two Pins Redi Lock Blank

Type 1 : Fan-shape Werkmaster Two Pins Redi Lock Blank



Werkmaster Two Pins  
Fan Shape Blank



Werkmaster Two Pins  
Trapeziod Shape Blank

#### Specifications:

Following are the general specifications **Single Round Segment Two Pins Werkmaster Disc:**



|                    |  |
|--------------------|--|
| Name:              | Werkmaster Diamond Metal Bond Grinding Pad |
| Segment No.:       | 1T   |
| Shape:             | Werkmaster                                 |
| Segment Thickness: | 10mm,12mm                                  |
| Segment Type:      | Round Shape Segment                        |
| Supplier:          | Factory or Manufacturer                    |
| Usage:             | For Concrete and Terrazzo Floor Grinding   |
| Material:          | Diamond Segments + Werkmaster Metal Blank  |

Specifically designed tools are available for any standard application. We can do it Tailor your equipment to your specific needs.

### Product Details:


#### Single Round Segment Two Pins Werkmaster Disc

- 1. Segment Long Lifespan
- 2. High Working Efficiency

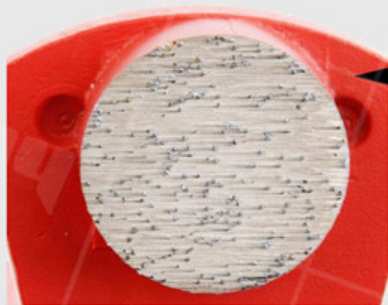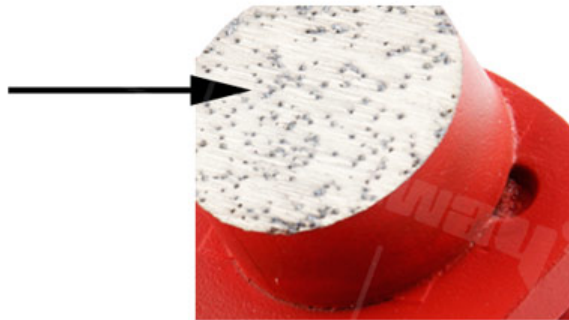


- 3. Balanced And Stable Grinding
- 4. Grit: 16/18# 20/25# 50/60#  
80/100# ETC

- 5. Segment No.: 10mm, 12mm

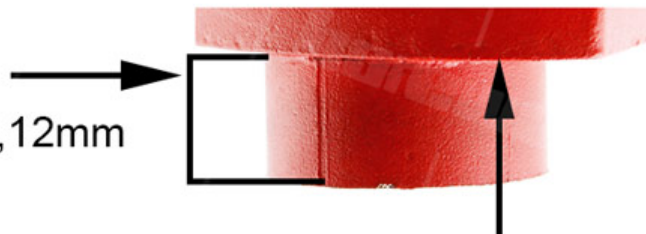

- 6. Very Strong Between The Cutter Head And The Base

**boneway®**

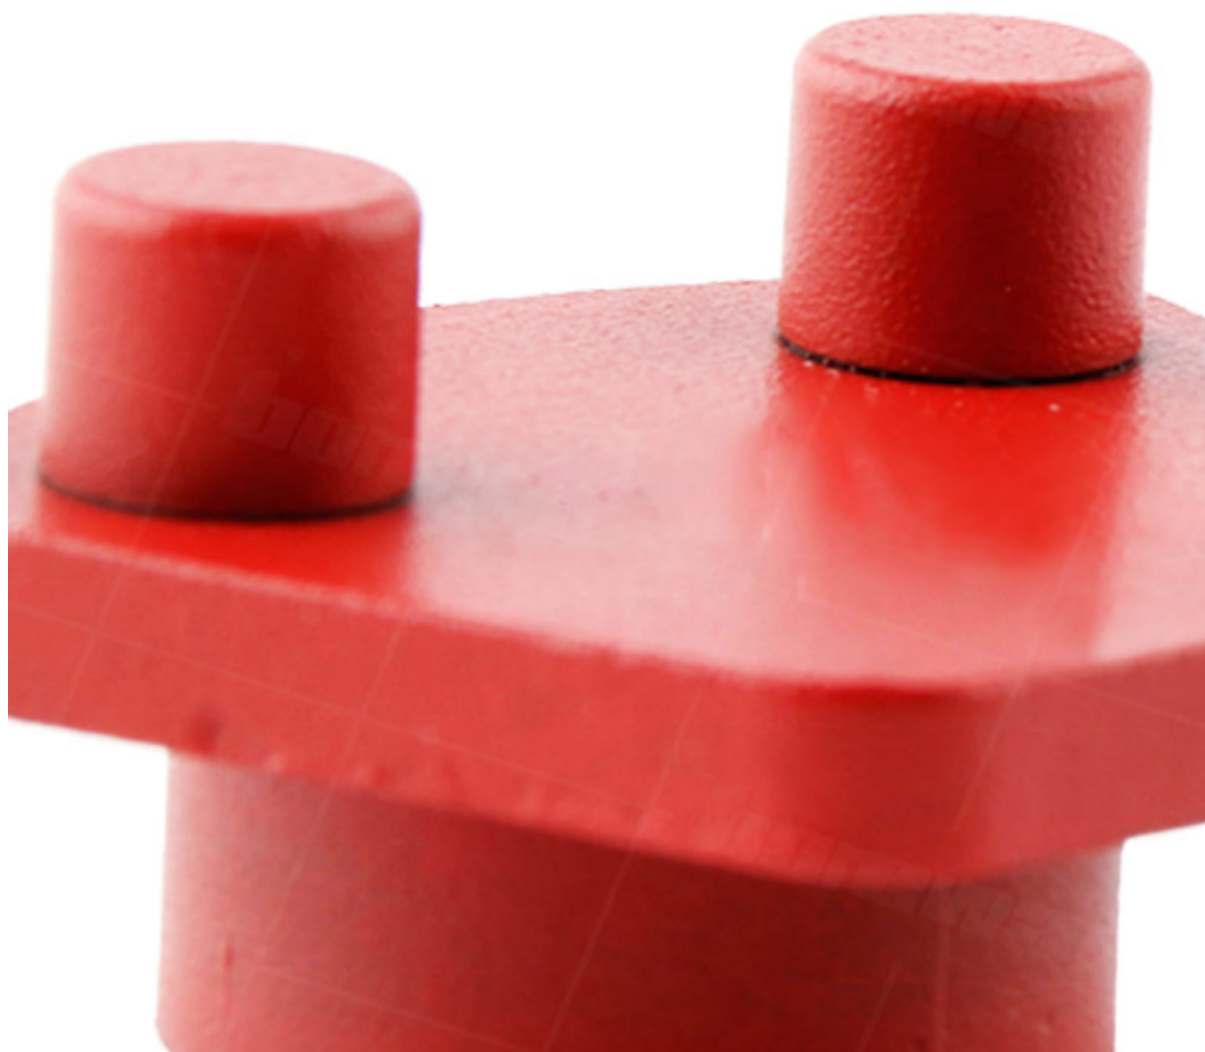

**boreway®**



[If you are interested in our products, you can click on me.](#)

#### **Application:**

**Single Round Segment Two Pins Werkmaster Disc** for various concrete floors.


Coarse grit: Could be used for un-even concrete floors , rough grinding preparation on floor or old floor renovation.

suitable for general (concrete,stone) grinding use while mostly they are used for paint, glue, epoxy removal and floor coating, high quality and high efficiency, long lifespan.





**Werkmaster Diamond Metal Bond Grinding Pad** could be used for all kinds of concrete and terrazzo floors , grinding preparation on floor or old floor renovation.

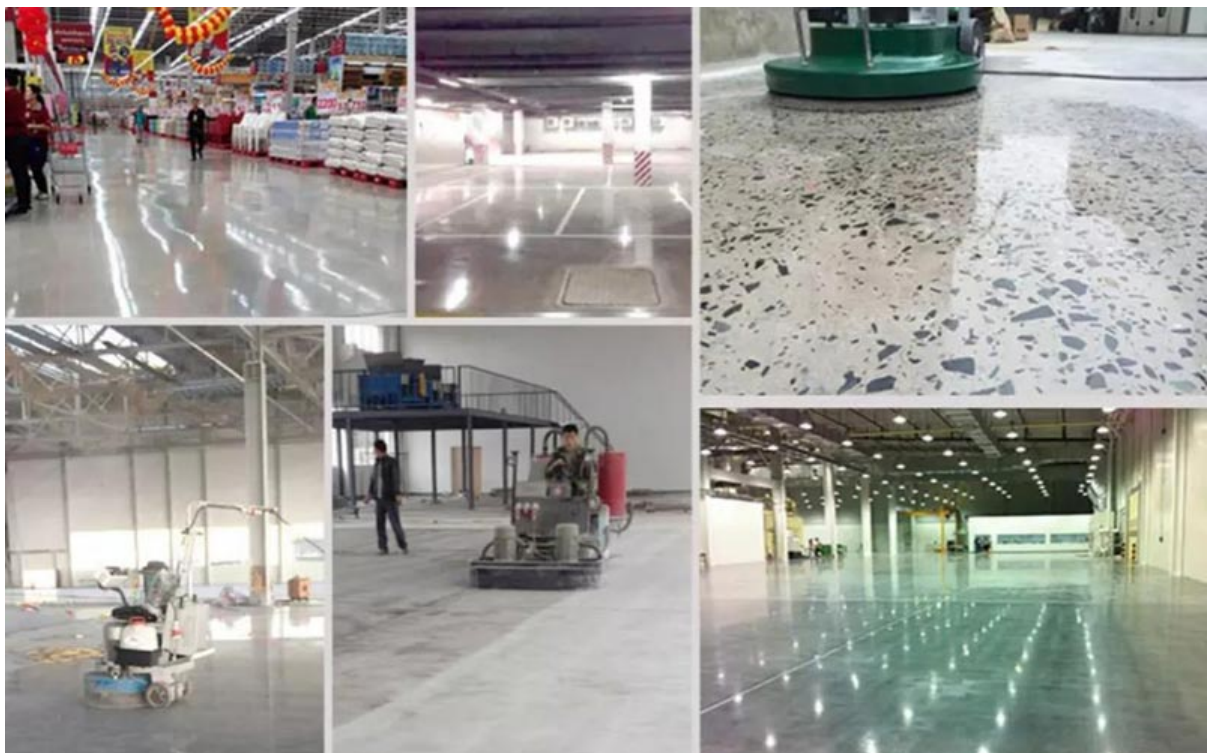


**Tips: Diamond Bond Choice**

**1. Soft Bond - For hard concrete**, between 4000 and 5500 psi. The bond must be softened to expose the diamond crystals to grind the hard surface. Hardened concrete consists of hardened granite, quartz, river stone, flint.

**2. Medium bonds - for medium concrete**, between 2500 and 4000 psi - are the suggested, most popular and most common bonds used in most cases. For use on common pit gravel and / or medium river stones, traprock, crushed gravel floors. Soft and hard bonds are usually reserved for extreme (unusual) cases.

**3. Hard Bond - For soft concrete**, typically below 2500 psi. Bonds have rigid metals in their matrix that withstand friction, so diamond crystals are not kicked-out before the surface has a chance to work. Soft concrete consists of limestone, sandstone, dolomite, soft shell.

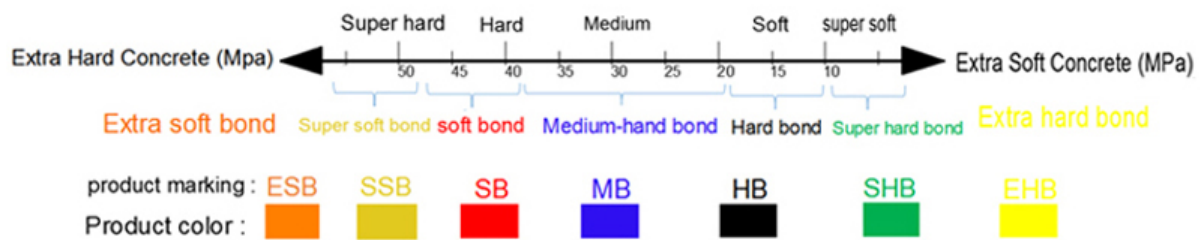

We also offer super soft bonds at 5500 psi for additional hard concrete. And super hard bonds for extra soft concrete.

## Related Products:



Boreway Machinery Co., Ltd  
[www.diamondtools.top](http://www.diamondtools.top)  
[www.boreway.net](http://www.boreway.net)

## [Z Segment Pad for Floor](#)

## About Us:



## Packing & Delivery:

PS:

- 1.Tools packing in carton cases
- 2.By Air/Sea for batch goods, Airport/Port receiving
- 3.Less than 45kg, generally delivery by express(Door to Door)
- 4.When tools are in large quantities, they are packing in wooden cases





- For sample or small orders, products could be sent by express, TNT, DHL, UPS, FedEx, EMS etc.
- For large orders, shipping by sea or air is recommended. By our long-term cooperate agent or your appointed forward.
- By sea, port of loading: Shanghai, Ningbo, Xiamen, Qingdao etc.



## Logistics:

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours

## Our Service:

- 1.Low MOQ: It can meet your trial order need well.
- 2.OEM Accepted: We can produce according to your sample or drawings.
- 3.Good Service: We treat our clients as God with high professionalism and passion.
- 4.Good Quality: We have strict quality control system. Good reputation in the market.
- 5.Fast Delivery: We have big discount from forwarder.

## FAQ:

### 1.How could we know the quality, if we want to order your products?

Please just test them with a very small order, then you will know the quality. At present,so many people in the world to use Chinese products, because of the high quality and most competitive prices. We are professional manufacturer in supplying diamond tools for more than 8 years. Anyway, confirming our products quality, a small trial order for testing will be necessary.

### 2.Can you offer free samples?

We don't offer free samples, according to our many years experience, we think people get the samples by paying, they will cherish and appreciate more what they get. But we are willing to give our potential customers a special discount which they are used to do a testing. It is very important to give us feedback, we appreciate it.

### 3.Does your company accept custom-made?

Surely, we accept it. Including different color, grit etc. We also can mark your own logo and brand on the pad. Any new products you want us to produce for you, just send us your drawing or

sample, we will produce the same one. We will not sell this kind of products to other customers only if we get your permission.

**Contact Us:**

**Fujian Nanan *boreway* Machinery Co.,Ltd.**



No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China



**TEL:** (+86)595-86990206 /



**Fax:** (+86)595-86990220



**Mobile/WhatsApp/Wechat:** (+ 86) 18650679939



**E-mail:** [boreway@boreway.com](mailto:boreway@boreway.com)



**Lyon Chang**